


Swift Series DC-40 GHz 2+1 Redundancy Switch Module

for Frequency Converters

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

The swift switch 2+1 redundancy module is for use in the 1U Genus chassis, specifically for Falcon frequency converter configurations. In 2+1 redundancy configuration, the chassis has capacity for up to three hot-swap frequency converter modules and 1 redundancy switch module.

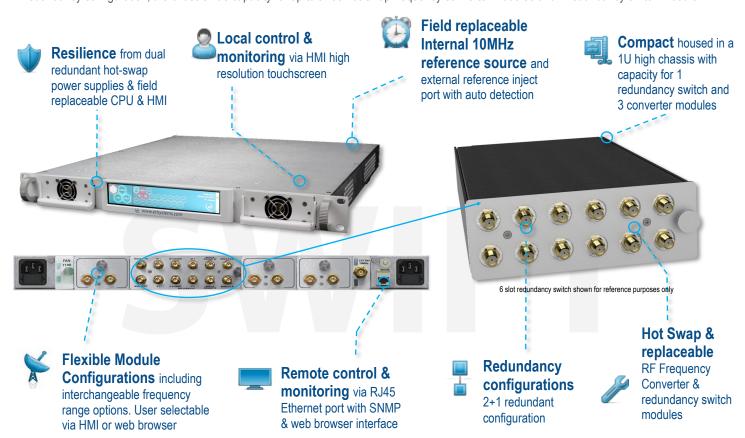

Chassis - Specification		
Dimensions / Weight / Colour	1U high x 550mm deep x 19" wide / <10 kg / RAL9003—White (Semi-matte)	
Capacity	Total of 17 module slots. Note that 1 slot may be used for fan (if required) and 1 slot may be used for 10 MHz EXT inject module (if required). Note actual modules may require >1 slot. Refer to required module spec table.	
Temperature	Operating: 0°C to +45°C / Storage: -20°C to +75°C	
Location / Humidity / Altitude	Indoor use only / 20 to 90% non-condensing / 10,000 feet AMSL (Operational) 30,000 feet AMSL (Storage) Above Mean Sea Level	
Control & Monitoring	Local: HMI touch screen Remote: Ethernet via RJ45, 10BaseT/100 BaseTx. TCP/IP, SNMP V3 & HTTPS & Web browser interface HMI and CPU field replaceable. Each module independently monitored and reported.	
MTTR	20 minutes (15 minutes to retrieve spare part and 5 mins to replace) Applies to LRUs only and assumed in house stock	
AC Input / Consumption	85-264Vac 50/60Hz / 150W	
PSU Redundancy	Dual redundant and alarmed Diode OR. Hot swappable	
Input & Output ports	Dependant upon module fitted	






















Swift Redundancy Switch Module Compact form factor allowing multiple

modules to be housed in 1U chassis. Each module uses 4 slots in the chassis.

		Swift Redundancy Switch Module - RF Parameters
Model Numbers		SWF-G1S-QX-116
Size		4 slots wide.
Redundancy		2+1
Frequency Range	Input / Output	DC to 40 GHz
	Output / Input	DC to 6 GHz
Insertion Loss (40 GHz Path) (Excludes all linking cables external from the module)	≤ 2.5 GHz	≤ 2.0 dB
	≤ 12.75 GHz	≤ 2.5 dB
	≤ 31.0 GHz	≤ 3.5 dB
Insertion Loss (6 GHz Path) (Excludes all linking cables external from the module)	≤ 2.5 GHz	≤ 2.5 dB
	≤ 6 GHz	≤ 3.0 dB
Insertion Loss Variation (Max) (Between input paths or output paths)		± 0.50 dB
Gain Flatness (Input/Output Path)	0.85—2.15 GHz	± 0.75 dB
	10.70—12.75 GHz	± 1.0 dB
	29.25 –31.00 GHz	± 1.5 dB
Return Loss (Input/Output Path)	0.85—2.15 GHz	-18 dB
	10.7—12.75 GHz	-14 dB
	29.25 –31.00 GHz	- 12 dB
Isolation (path to path)		55 dB min
Input Power Range		≤ +35 dBm
Spurs In-band	Non-carrier related	<- 85 dBm

2+1 Redundancy Configuration

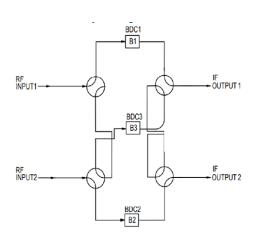

Specs are for standalone modules. There may be slight variation when used for frequency converter redundancy configurations

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product

development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage









