



Piranha Genus Standard LNB DC/10MHz injector, selectable 13/18V 22kHz, up to 500mA.

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

LNB DC power inserter module (Bias-T) to fit Genus 1U chassis series. Provides selectable 13VDC/18VDC/22kHz tone to LNBs or similar and RF power in monitoring. 10MHz injection onto port1 is switchable on/off when fitted to Genus chassis with 10MHz card fitted. Full control and monitoring of the module is possible locally through the parent chassis HMI (if fitted), or remotely via Ethernet.

DC Inserter Module



DC Inserter Module

Compact form factor allowing multiple modules to be housed in the Genus chassis. Each module occupies 1 slot in the chassis.



10MHz injection onto port 1 is switchable on/off (when fitted with 10MHz option).



Variable voltage

selectable 13/18VDC, and 22 kHz tone to LNBs



Hot Swap & replaceable

RF DC inserter module

Chassis Options



Local control & monitoring via HMI high resolution touchscreen



Flexible Module Configurations choose from a mixture of DC inserter modules.



Resilience from dual redundant hot -swap power supplies & field replaceable CPU & HMI



Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface



Compact indoor & outdoor chassis options, which can be part populated



Field replaceable Internal 10MHz reference source and external reference inject port with auto detection (optional)




Secure protocols with SNMPv3 and HTTPS



Indoor Chassis



Outdoor Unit

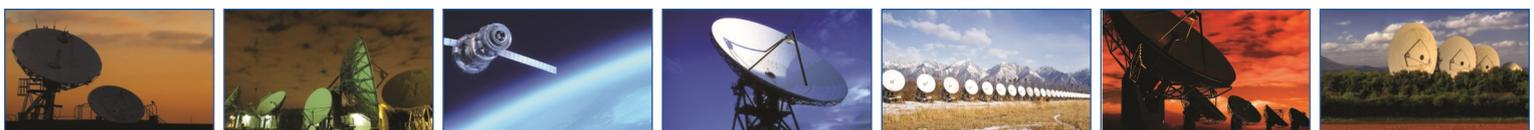



PRN LNB DC Power Inserter Module - RF Parameters				
Model Numbers		PRN-G1S-LS2-101		
Size		1 slot wide		
Capacity		Single path		
Frequency Range		850-2500 MHz		
RF Connectors		50Ω SMA	50Ω BNC	75Ω BNC 75Ω F-type
Insertion Loss (dB)		<1.5dB across full band		
Flatness (dB)	Full band	±0.40 dB		
	Any 36MHz	±0.15 dB		
Return Loss (dB)	Typ.	17 dB		
	Min.	14 dB		
Isolation		80 dB min between any two modules		
LNB Voltage		Off. 13V. 18V. 22kHz Tone on/off At port 1. Tolerance ±5% typ.		
LNB Load		Up to 500mA Maximum. Overcurrent protection: Current limited trip and restart.		
10MHz		Switchable on/off to port 1 (see parent chassis for detailed specification)		
Input RF Power		+20dBm. Absolute total maximum		
Module DC Power		12 VDC. Dual redundant 12V bus, module hot swappable		
DC Consumption		12W Full Load. 2W No Load. Max consumption at a steady state.		
RF Power Detect		Range -45dBm to 0dBm total power across band. For indication only		
User Alarms		Via Chassis Ethernet/HMI/Web Interface (upper and lower limits user settable) LNB Current RF Power In		
Remote Control & Monitoring		This module provides monitoring and control via connection with parent chassis. See parent chassis spec for specific details. Voltage/10MHz selection and current monitoring of LNB, and Alarms status monitoring.		
Local Control & Monitoring		Chassis LCD HMI front panel and LNB DC active LED on module face at rear.		
Module Weight		0.2kg		
Module Dimensions		255mm x 45mm x 20mm maximum. PRN-G1x chassis or Genus 1U series mountable.		
Module Finish		Machined Aluminium		
MTBF		>250,000 hrs		
Spec Version		1.0		

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

WEB
www.etsystems.com

EMAIL
info@etsystems.com

