



ETL Systems
New technologies
in RF distribution

Model Number:
SRY-G1S-TS2-179-xxxx
SRY-G1S-RS2-180-xxxx

StingRay RF Over Fibre Genus Module


L-band modules with 22KHz and 13V/18V switchable LNB power

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

StingRay L-band Transmit and Receive RF Over Fibre modules to fit Genus 1U chassis or ODU. The transmit module can provide LNB power 13/18VDC, 22kHz tone up to 500 mA. When fitted with a 10 MHz distributing module the TX/RX module can inject an external or internal 10 MHz tone onto the L-band feed.

Fibre Module

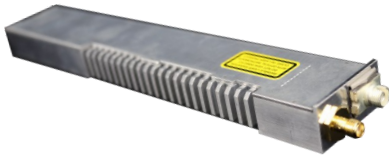

Fibre Module

Compact form factor allowing multiple modules to be housed in the Genus chassis. Each module occupies 1 slot in the chassis.



TX & RX module options to transmit and receive signals up to 10 km



850 - 2450 MHz operating frequency range



Hot Swap & replaceable RF module



LNB Powering 13/18V on TX modules only



High isolation between modules for signal quality

Chassis Options



Local control & monitoring via HMI high resolution touchscreen



Flexible Module Configurations choose from a mixture of fibre modules with different operating frequencies.



Resilience from dual redundant hot-swap power supplies & field replaceable CPU & HMI



Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface



Compact indoor & outdoor chassis options, which can be part populated



Field replaceable Internal 10MHz reference source and external reference inject port with auto detection (optional)



Secure protocols with SNMPv3 and HTTPS



Indoor Chassis



Outdoor Unit





StingRay TX & RX Module - RF Parameters		
Model Numbers	SRY-G1S-TS2-179	SRY-G1S-RS2-180
Frequency Range	850-2450 MHz	
Flatness (dB)	850 to 2450 MHz	±1.5 dB, Fixed gain mode, input -10 dBm, output -10 dBm.
	any 36MHz	±0.25 dB, Fixed gain mode, input -10 dBm, output -10 dBm.
Return Loss (dB)	50 ohm SMA	18 dB typ., 14 dB min
	50 ohm BNC	18 dB typ., 14 dB min
	75ohm BNC	14 dB typ., 10 dB min
	75 ohm F-type	14 dB typ., 10 dB min
Gain Setting Modes	Manual Gain Control (MGC) Automatic Gain Control (AGC) Fixed Gain (FG)	
Manual Gain Range	60 dB in 0.5 dB steps The MGC gain mode allows link optimisation for better Noise or Distortion performance	-
Output AGC flatness	±2.0 dB over full band. Input -10 to -40 dBm	
OIP3	850 to 2150MHz	Typical 23 dBm, Worst Case 20 dBm Test condition: 1m fibre, 10 dB gain, -23 dBm tones
CNR (in any 36 MHz)	Typical -50 dB, Worst Case -45 dB Test condition: 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power.	
Noise Figure	Typical 9 dB, Worst Case 12 dB Test condition: 1m fibre, -50 dB RF i/p power, -10 dBm o/p power	
Group Delay Variation	<2ns over full band. <0.5ns over any 36MHz.	
SFDR	850 to 2150MHz	107 dB/Hz ^{2/3} typ., 102 dB/Hz ^{2/3} min Test condition: 1m fibre, 10 dB gain, -23 dBm tones
RF Signal Range	Input: -70 to -10 dBm (total power) Operational i/p range (Note that all Specifications are only 'typical' between -60 & -70 dBm unless otherwise detailed).	Output: -70 to -10 dBm (total power) o/p range available under all i/p conditions. (Note that all Specifications are only 'typical' between -60 & -70 dBm unless otherwise detailed).
Max RF input	+16 dBm total power. Damage level, NOT operational.	-
10 MHz level at output	-10 to +10 dBm. User settable level via the chassis. Accuracy ±1 dB	-10 to +10 dBm. User settable level via the chassis. Accuracy ±1 dB
10MHz isolation	-40 dB. Between adjacent modules in same chassis	-40 dB. Between adjacent modules in same chassis
Laser Type	DFB. Optical isolator for improved performance	
Optical Wavelength	1310 ± 10 nm	1100 to 1650nm. Optimised for 1310nm and 1550 nm
Optical Power	Output: 4.5 ±2.5 dBm. 3.8 dBm typical	Input: 0 to 4.5 dBm. Max +10 dBm
Optical Connectors	FC/APC, SC/APC Single mode fibre. Use angle polish connectors only	
Module Dimensions	19mm x 38mm x 253mm. 0.2kg. Genus 1U series mountable.	
Power Consumption	15W Typical. With 18V 500 mA LNB Power.	4 W Typical
LNB Power	18/13V ±5 %, 500 mA max	-
Module Swap	Hot swap	
MTBF	>200,000 hours.	
LNB Power		
Number of Single modules fitted	Total Power Available for LNB powering @ 18V	
16	115 W	
14	120 W	
≤ 13	Limited by module specifications	
Spec Version	0.1	0.1

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.