



**Model Number: 23127-S5S5**

RF Engineering  
and Custom Build

## 8 x 1 IF / L-band Switch


With Local & Remote Control (Via RJ45 Ethernet Port)



Front View of Model 23127-S5S5

This 8x1 IF through L-band switch operates over the 50-2150MHz frequency range. The unit can be locally controlled using the illuminated push buttons on the front panel, and remotely controlled via an Ethernet port on the rear panel.

The switch is powered from a single mains power supply, which can be monitored via the front panel status LED or a dry contact alarm port for PSU failure on the rear panel.

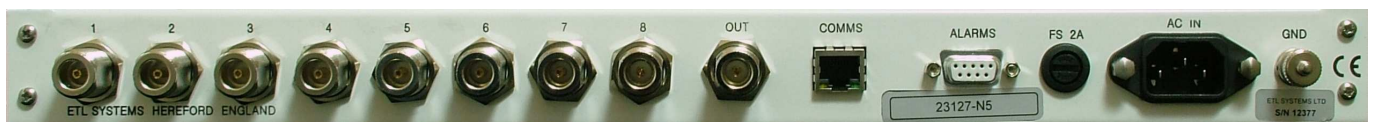

Rear View of Model 23127 with 50 ohm N-type connectors

This particular unit is supplied with 50 ohm SMA connectors, but other connector types and impedances are available (model numbers will vary).





# Model Number: 23127-S5S5

RF Engineering  
and Custom Build

8 x 1 IF / L-band Switch with Local & Remote Control (via  
RJ45 Ethernet Port)

Technical specifications and operating parameters

## PRELIMINARY SPECIFICATIONS

RF Parameters			
Capacity		8 x 1	
Frequency Range		50-2150 MHz (IF / L-band)	
Gain		1 dB $\pm$ 1 dB nominal, mean across band	
Flatness	850-2150MHz	$\pm$ 2.0 dB	$\pm$ 1.5 dB typical
1 dB Compression		0 dBm	5 dBm typical
Noise Figure		8 dB	
Isolation	I/P - O/P	60 dB	70 dB typical
	I/P - I/P	60 dB	70 dB typical
Input Return Loss		10 dB typical	
Output Return Loss		10 dB typical	

System Control	
Local Control	Via illuminated push buttons on the front panel
Remote Control	Via RJ45 Ethernet Port on the rear panel
Display	Front panel LED's for power status & illuminated push buttons to show current route selected
Alarms	Dry contact alarm port on rear panel for PSU failure

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	85% non-condensing

Power	
AC Power	85-264Vac 50/60Hz
LNB Power	None
PSU	Single
Hot-swap PSU	No

Physical	
Input Connector	SMA
Input Impedance	50 $\Omega$
Output Connector	SMA
Output Impedance	50 $\Omega$
Dimensions	1U high x 450mm deep x 19" wide
Weight	6 kg
Colour	White 00-E-55 semi-gloss

Key Features
Local & Remote Control
Single Power Supply
Dry contact alarm port for PSU failure

ETL SYSTEMS LIMITED  
Coldwell Radio Station  
Madley  
Hereford  
England HR2 9NE

TELEPHONE  
+44 (0)1981 259020  
EMAIL  
info@etlsystems.com

FACSIMILE  
+44 (0)1981 259021  
WEB  
www.etlsystems.com

