



Model Number: **D0104Q2ULA-B7B7**


4-way Quad L-band Active Splitter



This splitter shelf contains 4 of ETL's 4-way active equalised splitter modules, housed in a 2U shelf. This unit benefits from dual redundant power supplies for reliability in service.

Front view of Model D0104Q2ULA-B7B7

Front panel LEDs provide a visual status for the power supplies, and monitoring can also be done via a dry contact alarm port on the rear panel.

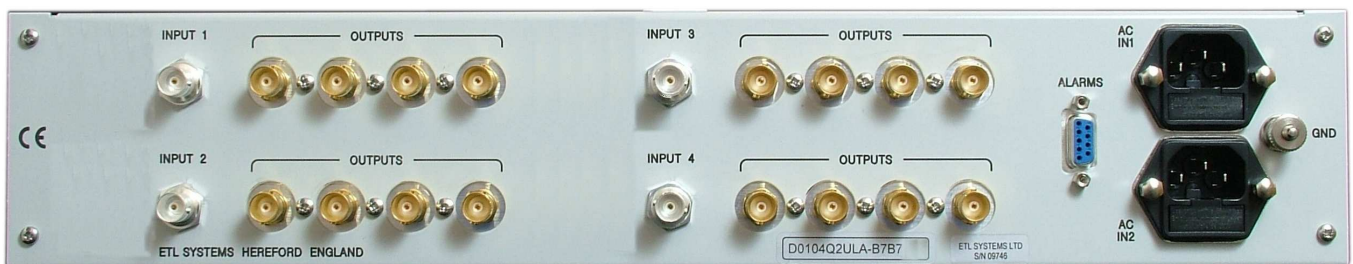

Rear view of Model D0104Q2ULA-B7B7

This particular unit is supplied with 75 ohm BNC connectors, but is available in a variety of impedances and connector types (model numbers will vary).





Model Number: D0104Q2ULA-B7B7

RF Engineering
and Custom Build

4-Way Quad L-band Active Splitter

Technical specifications and operating parameters

RF Parameters	
Capacity	4-way (quad)
Frequency Range	850-2150 MHz (L-band)
Gain	4 dB nominal (± 1 dB)
Flatness	850MHz-2150 MHz ± 1.5 dB typical
Noise Figure	7 dB
1dB compression	0 dBm
Input Return Loss	10 dB typical
Output Return Loss	12 dB typical

Power	
AC Power	85-264V AC (50/60Hz)
LNB Power	None
PSU	Dual Redundant
Hot-swap PSU	No

System Control	
Display	Front panel LED's for Power & PSU status
Alarms	Dry contact alarm port on rear panel for PSU failure

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	85% non-condensing

Physical	
Input Connector	BNC
Input Impedance	75Ω
Output Connector	BNC
Output Impedance	75Ω
Dimensions	2U high x 350mm deep x 19" wide
Weight	8 kg
Colour	White 00-E-55 semi-gloss (front panel)

Key Features	
Quad 4-way splitter	
Dual redundant power supplies	
Dry contact alarm port for PSU failure	
LED's for PSU status	

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020
EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021
WEB
www.etlsystems.com

