




## Single 8-way L-band Splitter

This single **L-band active splitter** gives excellent return loss and flatness, as well as providing 18V LNB Power.

It is fitted with dual redundant power supplies, which are monitored by LED's on the front panel and via a dry contact alarm port on the rear.

The power divider is available in a variety of impedances and connector types (model numbers will vary) and with the option of single or dual power supplies. This particular unit has 75 ohm BNC connectors.

product overview

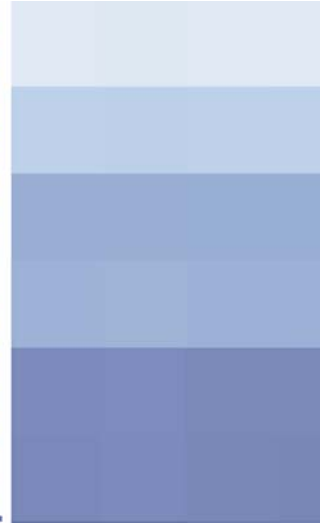

### Key features

- 850–2150 MHz operating range
- Switchable (on/off) LNB Power
- LNB Power: 18V nominal
- Gain 1 dB  $\pm$  1 dB
- Flatness  $\pm$  1.5 dB over the bandwidth
- Input Return loss 12 dB Typical
- Output Return loss 12 dB Typical
- 75 ohm BNC connectors IN and OUT

**Model D0108S1ULA-  
B7B7-D8**

*satellite systems*

# Single 8-Way L-band splitter - Technical Summary



Photo of rear panel of similar 8 way splitter

## Other information

- 85/264 VAC, 50/60 Hz
- Dual redundant power supplies with dual mains inlets
- Dry contact alarm for PSU failure
- 1U high 450mm deep 19" shelf
- Colour – Light Grey RAL 7035
- Weight – 8kg

<u>Parameter</u>	<u>Model D0108S1ULA-B7B7-D8</u>
Capacity	8-way
Frequency	850-2150 MHz
Impedance IN	75 $\Omega$
RF Port IN	BNC
Impedance OUT	75 $\Omega$
RF Port OUT	BNC
Insertion Gain	+1 dB nominal ( $\pm$ 1dB)
Flatness	$\pm$ 1.5 dB
Input Return Loss	12 dB Typical
Output Return Loss	12 dB Typical
1dB Compression Point (input power)	0dBm
Noise Figure	9dB
LNB Power	18V DC nominal

## D0108S1ULA-B7B7-D8



ETL Systems Limited  
Coldwell Radio Station  
Madley, Hereford,  
England HR2 9HJ  
T +44 (0)1981 259825  
F +44 (0)1981 259839  
E [info@etlsystems.com](mailto:info@etlsystems.com)  
[www.etlsystems.com](http://www.etlsystems.com)

ETL Systems develop, design and manufacture specialist equipment for satellite ground stations. For a fuller description of the ETL product range, please see our website on [www.etlsystems.com](http://www.etlsystems.com). This range can be used as the basis to meet your specific demands.

satellite systems



V 1.1 E & OE

THE QUEEN'S AWARDS  
FOR ENTERPRISE:  
INTERNATIONAL TRADE  
2007