





Single 8-way L-band Splitter

This single **L-band active splitter** gives excellent return loss and flatness. This unit does not provide LNB bias.

It is fitted with dual redundant power supplies, which are monitored by LED's on the front panel and via a dry contact alarm port on the rear.

The power divider is available in a variety of impedances and connector types (model numbers will vary) and with the option of single or dual power supplies. This particular unit has 75 ohm F-type connectors.

product overview

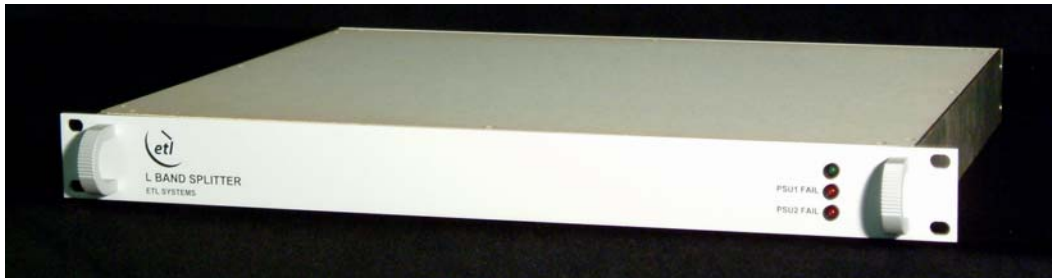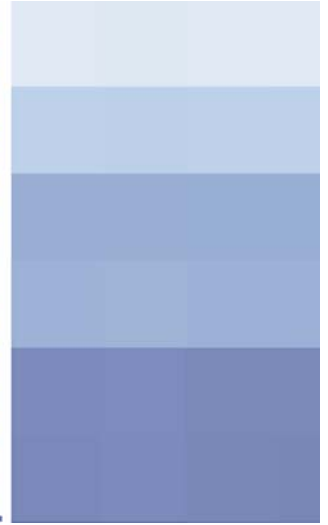

Key features

- 850–2150 MHz operating range
- No LNB bias
- Gain 2 dB \pm 2 dB
- Flatness \pm 2.0 dB over the bandwidth
- Input Return loss 8 dB Typical
- Output Return loss 8 dB Typical
- 75 ohm F-type connectors IN and OUT

**Model D0108S1ULA-
F7F7**

satellite systems

Single 8-Way L-band splitter - Technical Summary



Photo of rear panel of similar 8 way splitter with N-type connectors

Other information

- 85/264 VAC, 50/60 Hz
- Dual redundant power supplies with dual mains inlets
- Dry contact alarm for PSU failure
- 1U high 450mm deep 19" shelf
- Colour – Light Grey RAL 7035
- Weight – 8kg

<u>Parameter</u>	<u>Model D0108S1ULA-F7F7</u>
Capacity	8-way
Frequency	850-2150 MHz
Impedance IN	75 Ω
RF Port IN	F-type
Impedance OUT	75 Ω
RF Port OUT	F-type
Insertion Gain	+2 dB nominal (\pm 2dB)
Flatness	\pm 2.0 dB
Input Return Loss	8 dB Typical
Output Return Loss	8 dB Typical
1dB Compression Point (input power)	0 dBm
Noise Figure	7 dB

D0108S1ULA-F7F7



ETL Systems Limited
Coldwell Radio Station
Madley, Hereford,
England HR2 9HJ
T +44 (0)1981 259825
F +44 (0)1981 259839
E info@etlsystems.com
www.etlsystems.com

ETL Systems develop, design and manufacture specialist equipment for satellite ground stations. For a fuller description of the ETL product range, please see our website on www.etlsystems.com. This range can be used as the basis to meet your specific demands.

satellite systems

V 1.0 E & OE



THE QUEEN'S AWARDS
FOR ENTERPRISE:
INTERNATIONAL TRADE
2007