

Model Number: M1602B3UFO-21147-S5



16 x 2 SHF Blocking Matrix


With Local & Remote Control



This ETL SHF matrix is a high performance blocking switch matrix (or router) with 16 inputs and 2 outputs, integrated power supplies and matrix controller in a 3U shelf. It has a frequency operating range of 3 GHz to 18 GHz.

Front View of Model M1602B3UFO-21147-S5

The matrix incorporates a standard ETL controller which can be remotely controlled via a PC (using ETL software) or integrated into an M & C system.

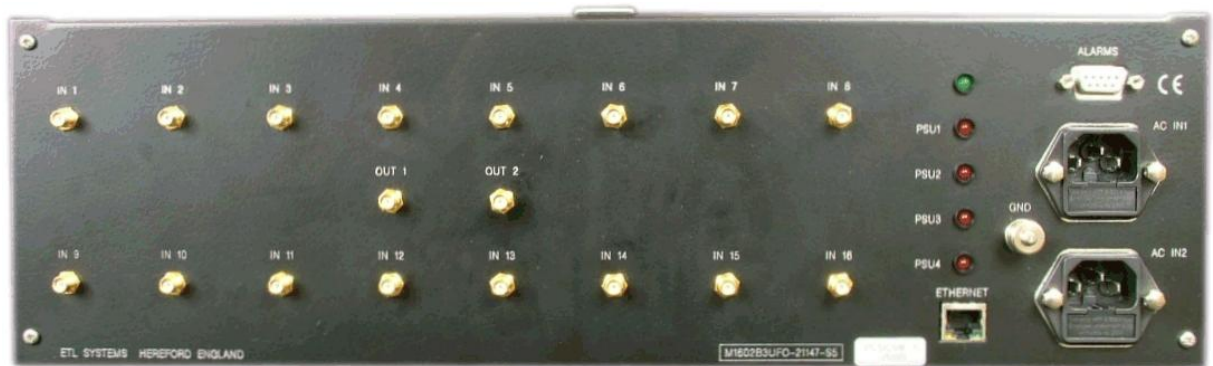

Rear view of Model M1602B3UFO-21147-S5

This passive matrix allows any input to be routed to any output and utilises latching, self terminating coaxial relays/multi-switches with isolation (minimum 60 dB at 18 GHz), and an expected operating life of 106 cycles. In the event of total power failure, all matrix settings are retained, and the latching relays will maintain the routed paths through the matrix providing uninterrupted operation. The unit is normally equipped with 50 ohm SMA connectors.



RESILIENCE

RELIABILITY

RF PERFORMANCE

CUSTOM BUILD

Technical specifications and operating parameters

RF Parameters	
Capacity	16 inputs x 2 outputs
Frequency Range	3 GHz – 18 GHz (SHF)
Isolation (I/P to O/P)	60 dB at 18 GHz
Insertion Loss	< 7 dB at 18 GHz
Switch Type	Latching Self Terminating, Coaxial Relay/multi-switch
Expected Switch Life	10 ⁶ cycles

System Control	
Local Control	Front Panel LCD Display and keypad
Remote Control	TCP/IP RJ45 Ethernet Port on rear panel

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	85% non-condensing

Physical	
Connectors	SMA
Impedance	50Ω
Dimensions	3U high x 450mm deep x 19" wide
Colour	White 00-E-55 semi-gloss or Matt Black (Front panel)
Weight	12 kg
Maintenance	Return to factory


Power	
AC Power	90-264V AC (50/60Hz)
LNB Power	None
PSU	Dual Redundant
Hot-swap PSU	No

Key Features	
Simple Protocol for M & C Integration	
Integrated Controller	
Alarmed internal PSU's	
Retains settings if power fails or if communications with controller fails	



ETL Systems Ltd, Coldwell Radio Station, Madley, Hereford, HR2 9NE, England

ETL Systems design, develop and manufacture specialist equipment for satellite ground stations. For a full description of the ETL product range, please see our website at www.etlsystems.com. This product range provides the basis for meeting your specific demands.



Tel +44 (0)1981 259020
Fax +44 (0)1981 259021
info@etlsystems.com