



Model Number: C0801S1ULA-F7F7


# 8-way Single L-band Active Combiner



Front View of Model C0801S1ULA-F7F7

This single 8-way active L-band combiner operates over the frequency range of 850-2150 MHz and is housed in a 1U high shelf. This unit benefits from dual redundant power supplies for reliability in service.

Monitoring of the dual redundant power supplies can be done via front panel LED's which provide a visual status of the power supplies and via a dry contact alarm port on the rear panel.

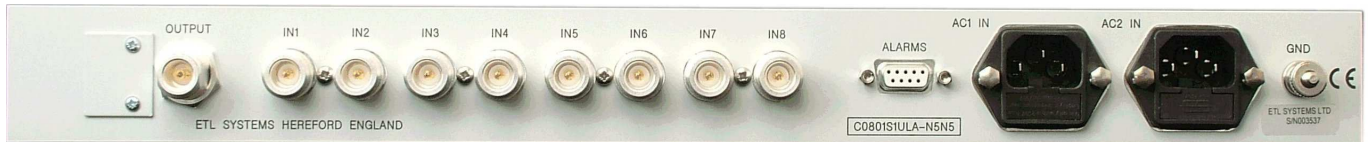

Rear View of Model C0801S1ULA with 50 ohm N-type connectors

This particular unit is supplied with 75 ohm F-type connectors, but is available in a variety of impedances and connector types (model numbers will vary).





# Model Number: C0801S1ULA-F7F7

RF Engineering  
and Custom Build

## 8-way Single L-band Active Combiner

### Technical specifications and operating parameters

RF Parameters			
Capacity		8- way	
Frequency Range		850-2150 MHz (L-band)	
Gain		1 dB $\pm$ 1.5 dB mean across band	
Flatness	850-2150MHz	$\pm$ 1.0 dB	$\pm$ 0.75 dB typical
	Any 36MHz	$\pm$ 0.5 dB	$\pm$ 0.3 dB typical
1dB Compression		+10 dBm	
Noise Figure		18 dB	
Input Return Loss		10 dB	14 dB typical
Output Return Loss		10 dB	14 dB typical

System Control	
Display	Front Panel LED's for Power & PSU status
Alarms	Dry contact alarm port on rear panel for PSU failure

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	85% non-condensing

Physical	
Input Connectors	F-type
Input Impedance	75 $\Omega$
Output Connectors	F-type
Output Impedance	75 $\Omega$
Dimensions	1U high x 350mm deep x 19" wide
Weight	8 kg
Colour	White 00-E-55 semi-gloss (Front panel)

Power	
AC Power	85-264V AC (50/60Hz), Fused 2A
LNB Power	None
PSU	Dual Redundant
Hot-swap PSU	No

Key Features	
Housed in a compact 1U high rack	
Dual redundant power supplies	
Front Panel LED's for power & PSU status	
Dry contact alarm port on rear panel for PSU failure	

ETL SYSTEMS LIMITED  
Coldwell Radio Station  
Madley  
Hereford  
England HR2 9NE

TELEPHONE  
+44 (0)1981 259020  
EMAIL  
info@etlsystems.com

FACSIMILE  
+44 (0)1981 259021  
WEB  
www.etlsystems.com

