


8-way L-band Active Hybrid Splitter & Combiner

with DC & 10MHz Pass

Typical applications:


- VSAT networks
- SNG & outside broadcast trucks
- Teleports with limited rack space

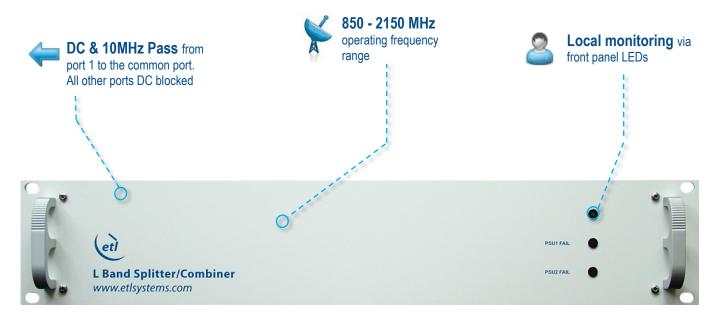



















Technical specifications and operating parameters

RF Parameters							
SPLITTER							
Capacity		8-way					
Frequency Range		850-2150 MHz (L-band)					
DC Block		Ports 2-8 Blocked, Port 1 to common is DC passing					
10MHz		Port 1 to common passes. Port 2-8 blocked					
RF Connectors		50Ω SMA	50Ω N-type	50Ω BNC	75Ω BNC	75Ω F-type	
Gain, typical, mean across band		0±1.5 dB	0±1.5 dB	0±1.5 dB	0±2.5 dB	0±2.5 dB	
Flatness	850-2150MHz	±1.0 dB	±1.2 dB	±1.5 dB	±2.0 dB	±2.0 dB	
	Any 36MHz	±0.5 dB	±0.5 dB	±0.75 dB	±1.0 dB	±1.0 dB	
Input Return Loss	Typical	18 dB	16 dB	15 dB	10 dB	10 dB	
	Minimum	14 dB	12 dB	12 dB	7 dB	7 dB	
Output Return Loss	Typical	18 dB	16 dB	15 dB	10 dB	10 dB	
	Minimum	14 dB	12 dB	12 dB	7 dB	7 dB	
Isolation, typical between any 2 outputs		25 dB	25 dB	25 dB	25 dB	25 dB	
Noise Figure, typical		9 dB	9 dB	9 dB	9 dB	9 dB	
1dB Gain Compression Point, output power		0 dBm	0 dBm	0 dBm	0 dBm	0 dBm	
Input RF Power		+ 10 dBm Absolute maximum					
COMBINE	R						
Capacity		8-way					
Frequency Range		850-2150 MHz (L-band)					
DC Block		Ports 2-8 Blocked, Port 1 to common is DC passing					
10MHz		Port 1 to common passes. Port 2-8 blocked					
RF Connectors		50Ω SMA	50Ω N-type	50Ω BNC	75Ω BNC	75Ω F-type	
Gain, typical band	, mean across	0±1.5 dB	0±1.5 dB	0±1.5 dB	0±2.5 dB	0±2.5 dB	
Flatness	850-2150MHz	±1.0 dB	±1.2 dB	±1.5 dB	±2.0 dB	±2.0 dB	
rialliess	Any 36MHz	±0.5 dB	±0.5 dB	±0.75 dB	±1.0 dB	±1.0 dB	
Input	Typical	18 dB	18 dB	14 dB	10 dB	10 dB	
Return Loss	Minimum	14 dB	14 dB	10 dB	8 dB	8 dB	
Output Return Loss	Typical	18 dB	18 dB	14 dB	10 dB	10 dB	
	Minimum	14 dB	14 dB	10 dB	8 dB	8 dB	
Isolation, typical between any 2 outputs		25 dB	25 dB	25 dB	25 dB	25 dB	
Noise Figure, typical		15 dB	15 dB	15 dB	15 dB	15 dB	
1dB Gain Compression Point, output power		+10 dBm	+10 dBm	+10 dBm	+10 dBm	+10 dBm	
Input RF Power		+ 10 dBm Absolute maximum					

Environmental			
Operating temperature	0 to 45°C		
Location	Indoor use only		
Storage temperature	-20°C to +75°C		
Humidity	20 to 90% non-condensing		
Altitude	10,000 feet Above Mean Sea Level (AMSL)		

Power				
PSU Power	85-264Vac 50-60Hz	Fused 2A		
AC Consumption	9W	Max. consumption at steady state		
LNB Power	None			
PSU	Dual redundant & alarmed	Diode OR. Not hot swap.		

	System Control
Local Monitoring	Via Front Panel status LEDs
Alarms	Dry contact (D-type) for PSU status

Physical			
Dimensions	2U high x 350mm deep x 19" wide		
Weight	8 kg		
Colour	White 00-E-55 semi-gloss		

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE TELEPHONE +44 (0)1981 259020

EMAIL info@etlsystems.com

FACSIMILE +44 (0)1981 259021

WEB www.etlsystems.com









