

## Model Number: **EQUL1P-4516**


- Reciprocal device
- DC blocked between the two ports
- 6dB positive slope

Available with RF connector options:

- 75 Ω BNC
- 75 Ω F-type.

**Compact** Housed in

**L-band Passive Equaliser** 

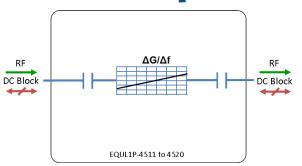

rugged compact enclosure

\*\*Www.et/systems.com\*\*

\*\*B50-2150 MHz\*\*

Operating frequency range. L-Band ready

Flexible
Mounting
Tapped screw &
through hole
mounting options

RF Parameters				
EQUL1P-4516-xxxx		B7B7	F7F7	
Frequency Range		850 - 2150 MHz		
RF Connectors		75Ω BNC	75Ω F-Type	
Mean Insertion Loss (dB)	Тур.	5.5	5.5	
	Max.	7.5	7.5	
Slope Positive (dB)		6.0 ± 1.5	6.0 ± 1.5	
Input Return Loss (dB)	Тур.	14	12	
	Min	8	8	
Output Return Loss (dB)	Тур.	14	12	
	Min	8	8	











## **Model Number: EQUL1P-4516** L-band Passive Equaliser


## **RF Components**

Environmental			
Operating Temperature		0°C to +65°C	
Storage Temperature		-20°C to +75°C	
Location		Indoor use Only	
Humidity	Max	90% non-condensing	
Altitude	Max	10,000 feet	

Max Operating Parameters		
Input RF Power	+37 dBm (5W)	
DC Voltage	28V	
DC Current	N/A	

Operation beyond these limits may cause instantaneous and permanent damage.

## **Physical Dimensions (mm)**

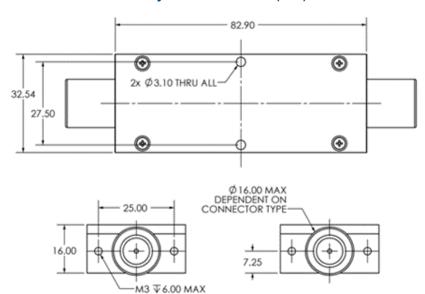

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.









