

## **Model Number:** VCN-11-XXXX

# 128x128 Vulcan L-band **Switch Matrix / Router**

#### Typical applications:

- Live news & Sport traffic for larger teleports.
- High capacity signal monitoring of satellite traffic.
- RF content acquisition for TVRO & IPTV head ends.
- Remote controlled unmanned satcom sites.



#### Software updates

**RF Monitoring** 

of input signals

Multiple user levels via web browser access & HMI enhancements



850 - 2150 MHz







#### **Automatic re-routing**

in the event of card failure with redundant paths




Local control & monitoring via front panel touch screen & XGA Display



#### **Ultra** compact

128x128 routing in a 16U high chassis

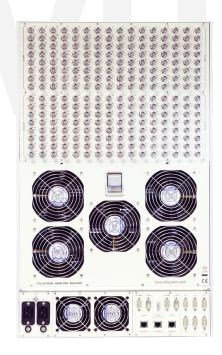





### Remote control & monitoring via RJ45

Ethernet port with SNMP & web browser interface



Resilience from dual redundant hot-swap power supplies & CPU modules & hot-swap RF cards



#### Dry contact alarm port & serial communications

for amplifier & power supply status















www.etlsystems.com V 1.0 E&OE



## Model Number: VCN-11-XXXX

128x128 Vulcan L-band Switch Matrix / Router

#### Technical specifications and operating parameters

RF Parameters						
Capacity		128 inputs x 128 outputs		Expandable to 1024 x 1024		
Routing		Distributive, non-blocking		Any input can be connected to any number of outputs		
Frequency Range		850-2150 MHz (L-band)		Extended frequency range available		
Input Levels		-70 dBm to -5 dBm		All parameters apply		
RF Connectors		50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type	
Gain mean across band		0±2.5 dB	0±2.5 dB	0±2.5 dB	0±2.5 dB	
Gain	850- 2150MHz	±2.75 dB	±2.75 dB	±2.75 dB	±3.0 dB	
Flatness	Any 36MHz	±0.5 dB	±0.6 dB	±0.75 dB	±0.8 dB	
Gain Trackin	Gain Tracking		±3 dB	±3 dB	±3 dB	
Maximum Ga	Maximum Gain G <sub>max</sub>		+10±1.5 dB	+10±1.5 dB	+10±1.5 dB	
Minimum Ga	Minimum Gain G <sub>min</sub>		-10±1.5 dB	-10±1.5 dB	-10±1.5 dB	
Gain Steps		1.0 ±1.0 dB Monotonous & control on inputs				
Input	Typical	18 dB	16 dB	14 dB	12 dB	
Return Loss	Minimum	12 dB	12 dB	10 dB	8 dB	
Output	Typical	18 dB	16 dB	14 dB	12 dB	
Return Loss	Minimum	12 dB	12 dB	10 dB	8 dB	
1dB Compre	ssion	≥ 0 dBm output power measured at mid-band				
OIP3		≥ 10 dBm	3rd order intercept point, output power. Equal signals @ -15 dBm			
OIP2		≥ +20 dBm	2nd order intercept point, output power.			
	I/P-I/P	≥ 65 dB	Minimum between any 2 output ports			
Isolation	I/P-O/P	≥ 55 dB	Typically ≥ 60 dB			
	O/P-O/P	≥ 70 dB	Minimum between any 2 output ports			
Group Delay		≤ 2.0 ns	Peak variation across the operational bandwidth			
Noise Figure		28 dB typical at unity gain setting				
Switching Time		≤ 100 ms	From when command received by interface until the connection is made			

Environmental		
Operating temperature	0 to 45°C	
Location	Indoor use only	
Storage temperature	-20°C to +75°C	
Humidity	85% non-condensing	

Physical				
Dimensions	16U high x 620mm deep x 19" wide	It is recommended that a rack of at least 800x1000mm depth should be used		
Weight	82 kg			
Colour	White 00-E-55 semi-gloss			

System Control				
Remote Control	Via RJ45 10/100 Base T. TCP/IP, SNMP Ethernet port or RS232/485 Serial Port Web browser interface included. PC software available.			
Local Control	Via front panel touch screen & XGA Display			
Display	Front panel XGA Display			
RF Monitoring	-50 to +5 dBm at unity gain	Input Power, High & Low Limits		
Alarms Dry contact alarm port on rear pane failure		rt on rear panel for PSU		
Comms/Power Failure	Retains Settings			

Power				
PSU Power	85-264V AC (47/63Hz) Fused, 20A via IEC C20 inlets			
AC Consumption	1kW	Max. consumption at steady state		
LNB Power	None			
PSU	Dual redundant, Diode OR	Either PSU rated to power matrix		
Hot-swap PSU	Yes			
DC Output Source	6 off +5 Vdc at 4A	Fused with self resetting fuses		
Input RF Power	+13 dBm Absolute Maximum			

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE

TELEPHONE +44 (0)1981 259020

EMAIL info@etlsystems.com

FACSIMILE +44 (0)1981 259021

WEB www.etlsystems.com









