

Model Number: D0104Q2ULA-XXXX


4-way Quad L-band Active Splitter



This splitter shelf contains 4 of ETL's 4-way active equalised splitter modules, housed in a 2U shelf. This unit benefits from dual redundant power supplies for reliability in service.

Front view of Model D0104Q2ULA-XXXX

Front panel LEDs provide a visual status for the power supplies, and monitoring can also be done via a dry contact alarm port on the rear panel.

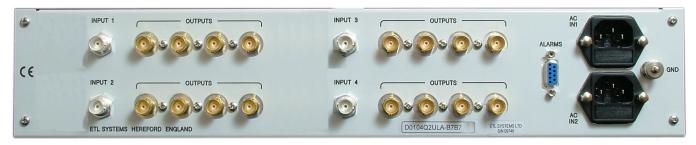

Rear view of Model D0104Q2ULA-B7B7 (with BNC 75 ohm connectors)

This unit is supplied with a variety of impedances and connector types (model numbers will vary).

















Model Number: D0104Q2ULA-XXXX

4-Way Quad L-band Active Splitter

Technical specifications and operating parameters

RF Parameters						
Capacity		4-way (quad)				
Frequency Range		850-2150 MHz (L-band)				
Input & Output Ports		50 Ω SMA	50Ω N-type	50Ω BNC	75Ω BNC	75Ω F-type
Gain (dB)		0±1.5 typical, mean	0±1.5 typical, mean	0±1.5 typical, mean	0±2 typical, mean	0±2 typical, mean
Flatness	850MHz- 2150 MHz	±1.25 dB	±1.25 dB	±1.25 dB	±1.5 dB	±1.5 dB
	Any 36MHz. band	±0.5 dB	±0.5 dB	±0.5 dB	±0.75 dB	±0.75 dB
Input Return Loss	Тур.	16 dB	16 dB	16 dB	12 dB	12 dB
	Min.	10 dB	10 dB	10 dB	8 dB	8 dB
Output	Тур.	18 dB	18 dB	16 dB	14 dB	14 dB
Return Loss	Min.	12 dB	12 dB	12 dB	10 dB	10 dB
Noise Figure		7 dB typical				
1dB Compression		0 dBm				
Isolation		23 dB max. between any two output ports				

Physical				
Dimensions	2U high x 350mm deep x 19" wide			
Weight	8 kg			
Colour	White 00-E-55 semi-gloss (front panel)			

Environmental			
Operating temperature	0 to 45°C		
Location	Indoor use only		
Storage temperature	-20°C to +75°C		
Humidity	20 to 90% non-condensing		
Altitude	10,000 feet AMSL		

System Control		
Display	Front panel LED's for Power & PSU status	
Alarms	Dry contact alarm port on rear panel for PSU failure	

Power				
AC Power	85-264V AC (50/60Hz) Fused 2A			
LNB Power	None			
PSU	Dual Redundant			
Hot-swap PSU	No			
AC Consumption	30W, max. consumption at steady state			

Key Features	
Quad 4-way splitter	
Dual redundant power supplies	
Dry contact alarm port for PSU failure	
LED's for PSU status	







