

# L-band Multiplexer

## 850 - 2150 MHz

850-2150 MHz  
Operating frequency  
range. L-Band ready




**Compact**  
Housed in rugged compact  
enclosure

**Flexible Mounting**  
Tapped screw & through  
hole mounting options


RF Parameters				
Model Variation	S5S5S5	N5N5N5	B5B5B5	F7F7F7
Frequency Range	850 - 2150 MHz			
RF Connectors	50Ω SMA	50Ω N-Type	75Ω BNC	75Ω F-Type
Common Port:	-			
Mean Insertion Loss (dB)	≤0.4			≤0.6
Flatness (dB)	± 0.15		± 0.3	± 0.5
Return Loss (dB)	20	18	16	12
	15	14	12	8
L-band Port:	-			
Return Loss (dB)	20	18	16	12
	15	14	12	8
10MHz:	-			
Mean Insertion Loss (dB)	≤0.3		≤0.5	≤0.6
Isolation (dB)	Typical	23	20	18
Max Operating Parameters				
Input RF Power	5W (total RF power)			
DC Voltage	50V			
Physical & Environmental				
Operating Temperature	0°C to +45°C			
Storage Temperature	-20°C to +85°C			
Location	Indoor use only			
Humidity	85% non-condensing (maximum)			
Altitude	10,000ft (maximum)			

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.


## Diagram

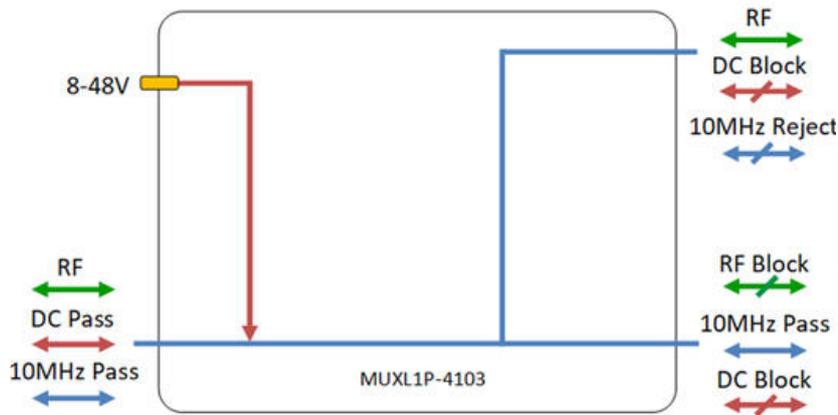


## Physical Dimensions (mm)

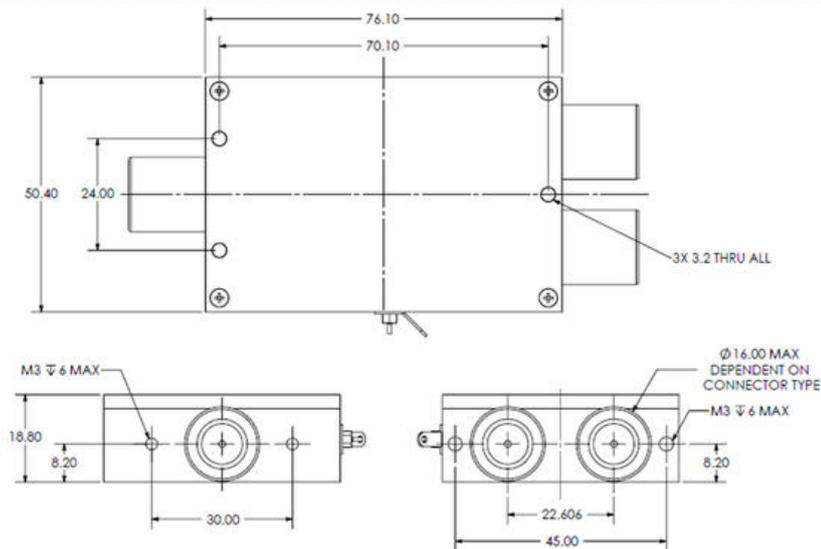


## Test Plots

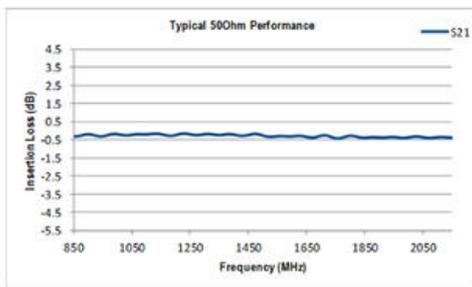

Insertion Loss (dB)

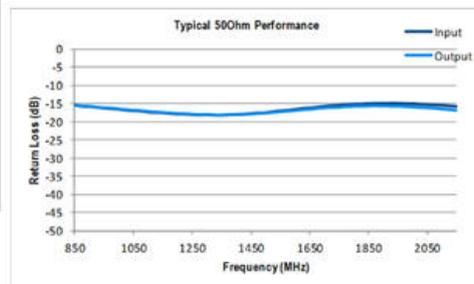

Return Loss (dB)

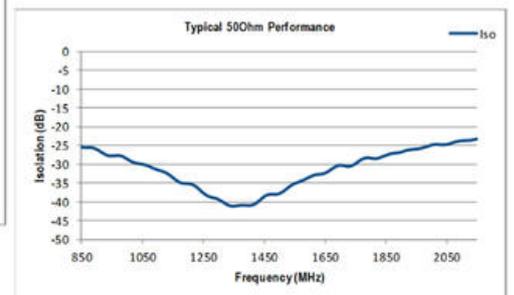

Isolation (dB)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.