


Miniature Signal Generators SG Series

The SG series of Miniature Signal Generators are supplied with control software, USB to mini USB cable and AC power supply adaptor.

25 - 3000MHz
Operating frequency range

External or Internal (+/-1ppm)
Reference

High Output
+13dBm up to 3GHz

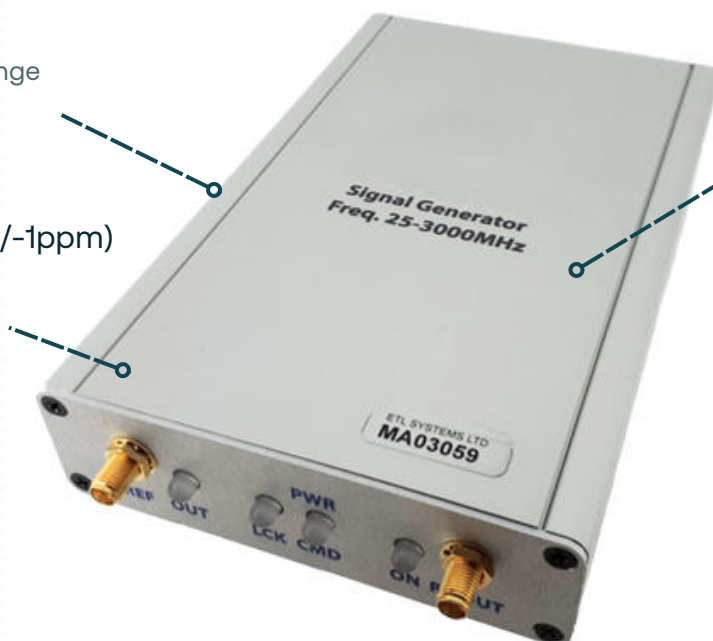

- Full Range Tuning
- Frequency & Level Control

* Image Representative of Range

USB, Ethernet and
RS-232 Interface





RF Performance				
Frequency Range	25 - 3000 MHz			
Frequency Step Size	1Hz			
Output Power Level	+13dBm			
Output Range	+13dBm to -17dBm, 0.5dB Steps (output level set in dBm)			
Internal Reference	100MHz, ± 20 ppm over temperature, ± 1 ppm per year (± 3 ppm in 1st year)			
Phase Noise Max (dBc/Hz)	Frequency 25 - 250MHz 250 - 1000MHz 1000 - 3000MHz	1KHz Offset -98 -92 -83	10KHz Offset -106 -96 -94	100KHz Offset -112 -106 -101
Spurious	Maximum: < -50dBc, Typical: < -70dBc			
Harmonics	Maximum: -20dBc, Typical: -25dBc			
RF Output connector	SMA Female			
Reference Connector	SMA Female Reference Input / Output autodetect and switch 100MHz Output Selectable 10 or 100MHz input (software programmable frequency) @ -4 to +12dBm			

Interface	
Control Interface	USB: Virtual COM port RS-232: 9-pin male D-sub connector Ethernet: RJ45 connector
Output Modes	Continuous Sweep On/Off via external trigger
External Trigger	Pin 4 of RS-232 connector: Pulse TTL/RS232 levels, 50ms min. pulse width Manual trigger via GUI
Status Indicators	Power Lock RF Output Reference Out
PC User Interfaces	Third-part terminal application (e.g. HyperTerm): • ASCII commands Graphical User Interface Executable File: • Adjust frequency and output power level • Set reference frequency • Select operation mode • Set power-on defaults • Adjust sweep configuration • Change device network settings • Control multiple units
Internal Memory	Non-volatile, automatically stores most recent settings



Power	
Power Input	9 - 28V DC 12V, 3.0A AC adaptor with 1.20m lead included Current consumption: 300mA typ. at 12V Can be powered also via USB3.0, current consumption: 860mA typ. at 5V
Power Selection	Automatic Switching Coaxial Power jack selected by default USB power used when coaxial power not present

Environmental	
Operating Temperature	-20 to +50C
Storage Temperature	-40 to +85C

Mechanical	
Dimensions	163mm x 103mm x 30.5mm
Weight	350g
Material	Aluminium extrusion Aluminium endplates with black legend Rubber Feet

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Options: Optional product OPT06 is a Mounting Bracket Pair - Supplied fitted to the unit.