

Broadband to Optical Fibre Transmit Module



RF Parameters		
Frequency Range	50 to 2450 MHz	
RF Connectors	50 ohm SMA / 75 ohm BNC / 75 ohm F-type	
Flatness	± 2.0 dB 50 to 200 MHz ± 2.0 dB 850 to 2450 MHz ± 0.25 dB, any 36MHz i/p > -50dBm ± 0.5 dB, any 36MHz i/p < -50dBm	Full TX &RX link with 10km fibre link using SRY-RX-B2-404 Fixed gain mode Any 36 MHz Applies only 850-2450 MHz
Return Loss: 50 ohm SMA 50 ohm BNC 75ohm BNC 75 ohm F-type	18 dB typ., 12dB min 18 dB typ., 12dB min 16 dB typ., 12dB min 16 dB typ., 12dB min	All RF connectors are female. All RF ports are DC blocked
Monitor port	-20dB ± 3 dB	Mounted on module
OIP3	Typical 17 dBm Worst Case 14 dBm	Test condition: 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152 MHz
CNR (in any 36MHz)	Typical -50 dB Worst Case -45 dB	Test condition: 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power.
NF	Typical 10dB Worst Case 12dB	Test condition: 1m fibre -50 dBm RF i/p power, -10 dBm o/p power
Group Delay variation	2ns over full band	1ns over any 36MHz
SFDR	105 dB/Hz ^{2/3} typ., 100 dB/Hz ^{2/3} min.	Test condition: 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152MHz
IMD3	-65 dBc typ., -60 dBc min.	Test condition: As SFDR above
RF Input Signal Range	-60 to -10dBm (total power)	Operational i/p range
Max RF input	16dBm total power	16dBm total power
Optical Parameters		
Optical Wavelength	1310 \pm 10 nm	
Laser Type	DFB	Optical isolator for improved performance
Optical Power Output	4.5 \pm 2.5 dBm	
Optical Connectors	FC/APC SC/APC	Single mode fibre Use angle polish connectors only




Non RF Parameters		
Module swap	Hot swap	
Power supply voltage	12V ±1V	Single or dual redundant power
Power consumption	15W typical	With 18V 500 mA LNB power
LNB Power	18/13V ±5 %, 500 mA max	Short circuit current 750 mA max.
MTBF	>200,000 hours	Module MTBF

Control, Monitoring & Alarms			
Control DIP Switch Position	1 2 3 4 5	LNB on/off LNB 13/18 v LNB 22 kHz on/off AGC on/Gain fixed Reserved	Remove cover to access DIP switch
Indicator lights Power Status Green Status Red	Module powered Module OK Internal monitoring alarm		
Monitoring includes	Laser Optical Output Power Status of amplifier stages Module temperature	Monitored in each module	
AGC	Factory set	Once AGC level set, gain can be fixed	

Environmental conditions		
Operating Temperature	-20°C to +65°C	Mount away from sources of heat. Forced air cooling may be required dependant on application.
Storage Temperature	-40°C to +90°C	
Location	Indoor use	Outdoor use as part of ETL ODU only
Humidity	20 to 90% non-condensing	Relative Humidity
Altitude	10,000 ft AMSL operational 30,000 ft AMSL storage/transport	Above mean sea level

Physical Dimensions (mm)

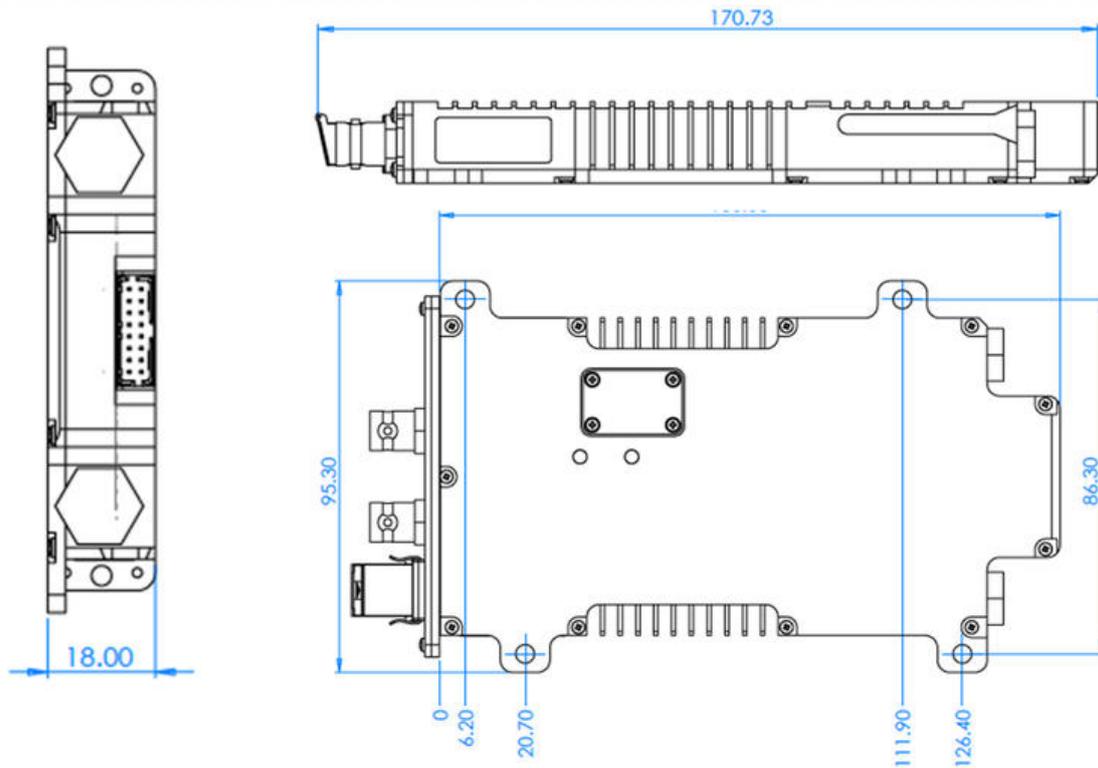

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.