


Swift Series DC-6 GHz 2+1 Redundancy Switch Module for Frequency Converters


The swift switch 2+1 redundancy module is for use in the 1U Genus chassis, specifically for Falcon frequency converter configurations. In 2+1 redundancy configuration, the chassis has capacity for up to three hot-swap frequency converter modules and 1 redundancy switch module.

Chassis

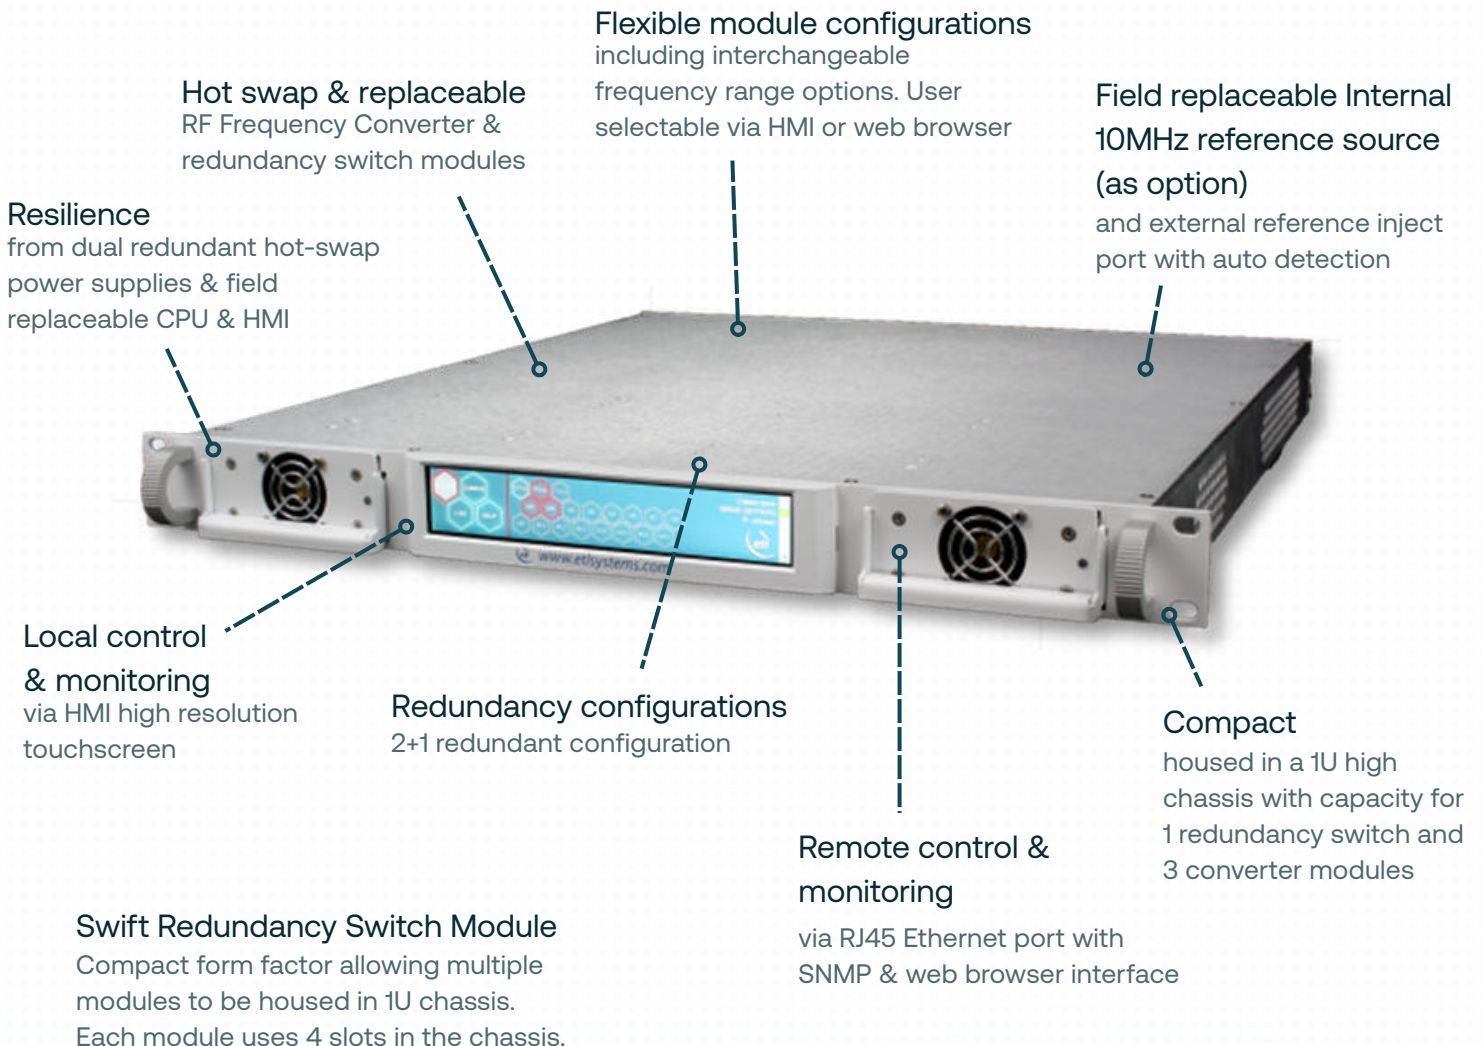

RF Parameters	
Model Numbers	SWF-G1S-CX-117
Size	4 slots wide.
Configurations	1 redundancy switch & 3 converter modules.
Redundancy	2+1
Frequency Range	Input / Output: DC to 6 GHz Output / Input: DC to 6 GHz
Insertion Loss (Input Path)	≤ 2.5 GHz: ≤ 2.5 dB > 2.5 GHz; ≤ 6 GHz: ≤ 3.0 dB
Insertion Loss (Output Path)	≤ 2.5 GHz: ≤ 2.5 dB ≤ 6 GHz: ≤ 3.0 dB
Insertion Loss Variation (Max)	± 0.55 dB
Gain Flatness (Input/Output Path)	≤ 2.15 GHz: ± 1.0 dB ≤ 6 GHz: ± 1.5 dB
Return Loss (Input/Output Path)	≤ 2.5 GHz: 16 dB > 2.5 GHz; ≤ 6 GHz: 14 dB
Isolation (path to path)	55 dB min
Input Power Range	$\leq +35$ dBm
Spurs In-band	Non-carrier related: < -85 dBm. In 1 kHz Bandwidth
Environmental	
Temperature	Operating: 0 to 45°C Storage: -20°C to +75°C
Location	Indoor use only, within parent GENUS chassis
Humidity	20 to 90% non-condensing
Altitude	10,000ft / 3000m AMSL

2+1 Redundancy Configuration

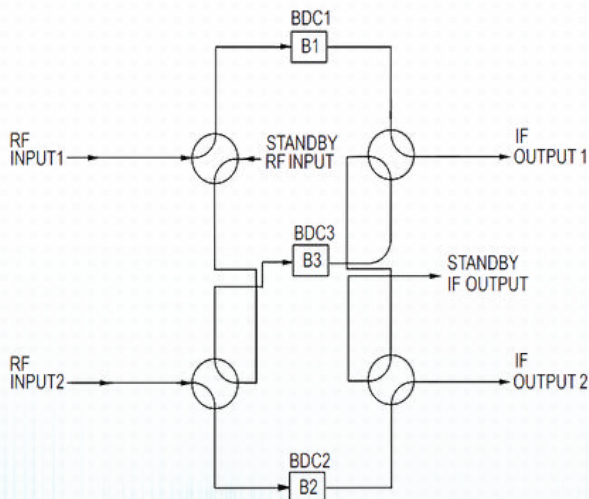

Specs are for standalone modules. There may be slight variation when used for frequency converter redundancy configurations.

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.