

# Havoc 256x256 L-band Matrix

## Ultra compact

ETL's new ultra compact Havoc matrix provides routing for up to 256 input and output feeds in a 16U chassis. The matrix can be expanded from 16x16 up to 256x256 in blocks of 16.

### Minimal downtime

All active components can be hot-swapped without the need to re-boot the matrix. This includes power supplies, CPU modules, RF modules & fan trays.

### Temperature monitoring

With intelligent fan speed control

### Power saving

Only active signal routes are powered. This provides a greatly reduced power consumption compared to traditional matrices.

### Resilience

From quad redundant power supplies & dual redundant CPU modules

### Minimal training

Capacitive touchscreen controls, intuitive HMI and an improved web browser interface

### Compact

16U chassis providing 256 inputs x 256 outputs

### 850 - 2450 MHz


Operating frequency range, Ka-band ready

### Expandable

Order in smaller sizes and expand in blocks of 16. Multi-chassis expansion available up to a maximum of 1024x1024

### Secure comms

With HTTPS, SNMPv3 and IPSEC protocols

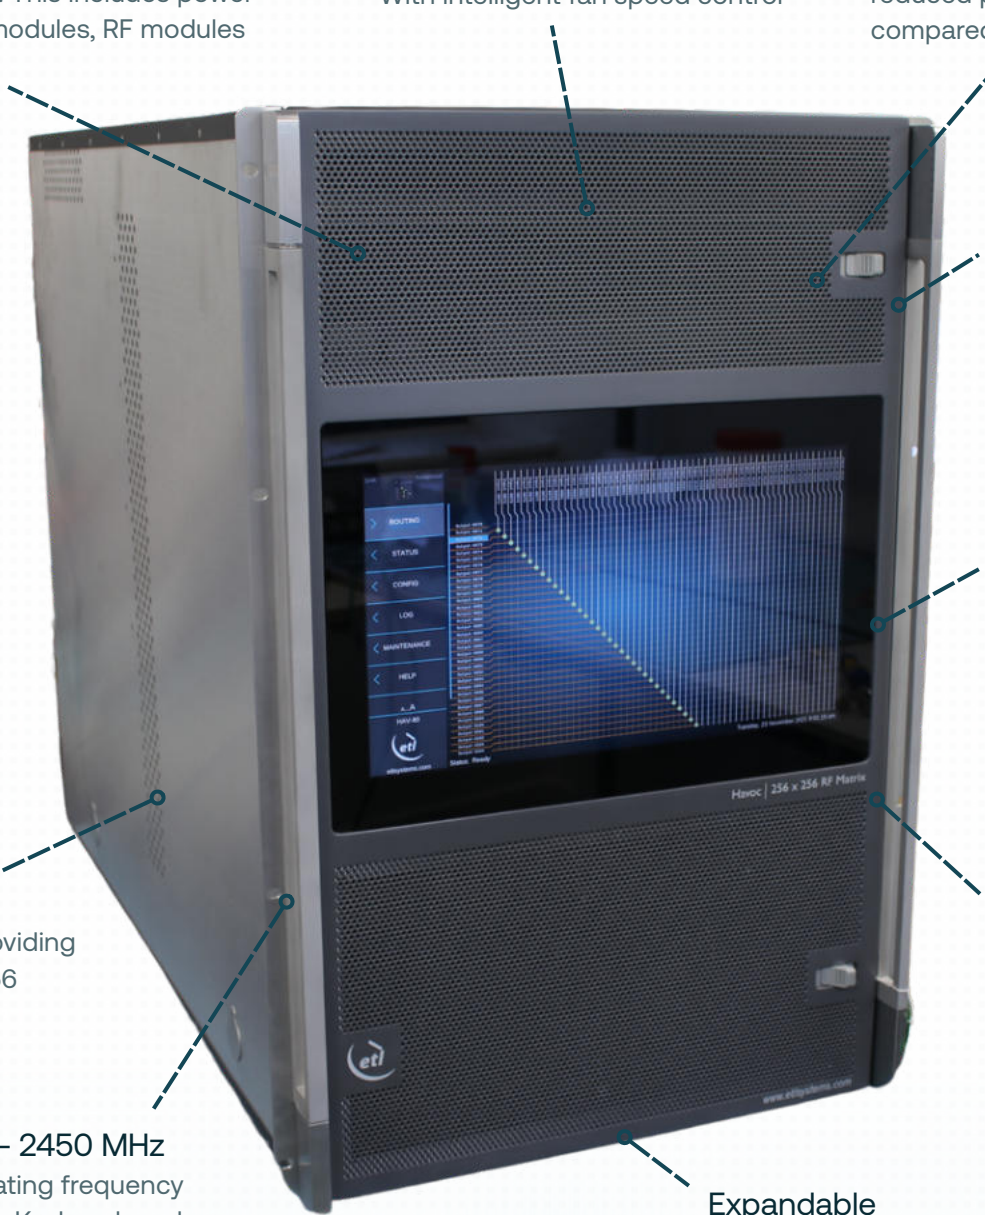

| RF Parameters                                      |  |          |
|--|--|----------|
| Routing  | Distributive (Fan-Out), Non-Blocking   |          |
| Frequency Range                                    | 850 to 2450MHz   |          |
| Capacity   | 256 inputs and 256 outputs, configurable in banks of 16 inputs/outputs                       |          |
| Power Consumption                                  | <5W  |          |
| Input & Output Ports                               | 50 Ω SMA, all ports DC blocked   |          |
| Gain (dB) Typ., mean across band                   | 0±2  |          |
| Gain Flatness (dB)                                 | Full band  | ±2.0     |
|  | Any 36MHz  | ±0.5     |
| Input Return Loss (dB)                             | Typ.   | 18       |
|  | Min.   | 14       |
| Output Return Loss (dB)                            | Typ.   | 20       |
|  | Min.   | 18       |
| Gain Tracking                                      | 4 dB (Difference in mean gain between any two outputs when the same input is routed to both) |          |
| Gain Stability over Time                           | ±0.2 dB / 24 hours   |          |
| Gain Stability vs Temp                             | 0.1dB / °C   |          |
| Isolation (dB) Min. between any 2 ports            | Input-Input  | 80 dB    |
|  | Output-Output  | 80dB     |
|  | Input-Output   | 55 dB    |
| Noise Figure (dB)                                  | Typ. 20 dB   |          |
| 1dB GCP (dBm) Output power, Min.                   | 850 - 2150MHz  | -3       |
|  | >2150MHz   | -5       |
| OIP3 (dBm) Output power, Typ.                      | 850 - 2150MHz  | +15      |
|  | >2150MHz   | +10      |
| OIP2 (dBm), Output power, Typ.                     | +33 (Second order intercept point)   |          |
| Group Delay (Peak-Peak across specified bandwidth) | Full band  | <1.0 ns  |
|  | Any 36MHz  | ±0.25 ns |
| SFDR   | >110 dBm/Hz <sup>2</sup> /3  |          |
| Non RF Parameters                                  |  |          |
| All Active Cards                                   | Hot swappable  |          |
| PSU Modules  | Quad redundant hot swappable   |          |
| CPUs   | Hot swap dual CPU  |          |
| Power Requirement                                  | 85-264Vac 47-63Hz Fused 4A   |          |
| Power Consumption                                  | 600W (idle state) / 1.8kW (fully routed) Only routed paths are powered.                      |          |
| MTBF   | 150,000 hours (17.1 years) TBC, fully populated 256x256 chassis                              |          |
| MTBF (RF Cards)                                    | 180,000 hours (20.5 years) TBC, each active RF card  |          |
| MTTR   | 20 minutes. Assumes recommended spares are available.  |          |

| Control, Monitoring & Alarms |  |
|------------------------------|--|
| Remote Control & Monitoring  | Ethernet – RJ45 connector, 10/100/1000BaseTx, ETL Protocol over TCP, SNMP, Web Interface,    |
| HMI                          | Capacitive touch screen  |
| Secure Communications        | HTTPS<br>SNMPv3  |
| ETL Protocol over TCP        | Supports up to 32 concurrent connections   |
| Web Browser                  | Full remote control via web browser for 5 connections  |
| Alarms                       | Comprehensive alarm status on communication protocols and front panel                        |
| Switching Time               | Approx. 50ms (Measured from receipt of command on serial port to establishment of RF signal) |
| Amplifier Status             | All RF amplifiers monitored. Local and Remote reporting.                                     |
| Temperature Monitoring       | All cards and modules individually monitored. Alarm when pre-set limits are exceeded.        |
| Fan Speed Monitoring         | All fans fitted with tachos. Alarm on over or under speed.                                   |
| PSU Loading                  | Monitor unit power consumption. Report locally and remotely.                                 |
| Physical & Environmental     |  |
| Dimensions                   | 16U high x 850mm deep x 19" wide   |
| Weight/Colour                | 184kg, RAL9023 – Pearl Dark Grey   |
| Temperature                  | Operating: 0 to 45°C / Storage: -20°C to +75°C   |
| Location                     | Indoor use only  |
| Humidity                     | 20 to 90% non-condensing   |
| Altitude                     | 2,000 feet AMSL (Operational) 8,000 feet AMSL (Storage) Above Mean Sea Level                 |
| Absolute Maximum Ratings     |  |
| Max. DC Voltage on RF Ports  | 48Vdc, all ports are DC blocked  |
| Input RF Power               | +27dBm, any RF port  |

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.