

SpacePath Ultralinear 650W Ka-Band Antenna Mount HPA Liquid Cooled

The STA5565P-LC Ka series HPA provides ultra linear, high efficiency performance in a compact, lightweight, rugged, weatherproof, antenna mount enclosure. The HPA is Liquid Cooled offering the following advantages over Air Cooled units; lower acoustic noise, lower heat dissipation in the hub, improved gain stability. In addition, demands on the hub air conditioning are greatly reduced. Installation is simple with driplless connectors that do not leak when disconnected under pressure.

The amplifiers, are user-friendly and incorporate a comprehensive remote control facility as standard, including SNMP V3 and a feature-rich web user interface, alongside RS485, and RS232.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 30 years of experience in the design and manufacture of satellite amplifiers.


The company's products have an enviable reputation for performance, robust quality and reliable service. The STA5565P-LC Ka is available with a wide range of options and accessories, backed by worldwide technical support.

Features

- Provides up to 304W of Linear Power at the flange
- Advanced cooling design enables operation at +60°C and in direct sunlight
- Liquid cooled for ease of hub installation
- Ethernet/SMP/Webpage GUI interfaces
- Broadband – high efficiency operation
- Wide input voltage range - can operate from mains supplies worldwide
- Redundant control - contains control and drive circuits for 1:1 redundancy
- Stand-alone setting - automatically sequences to transmit mode
- Wide range of accessories including: Controllers, waveguide networks, cable assemblies



Block Diagram

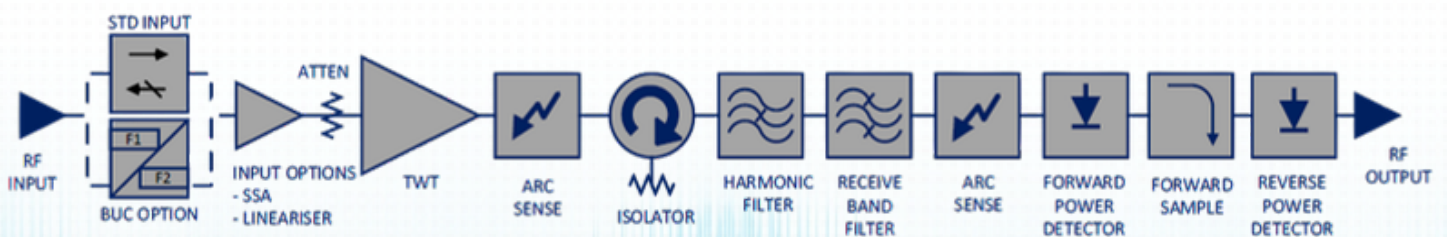

RF Performance

Frequency range*		Full Bandwidth: 27.0 - 31.0 GHz KA1: 27.5 - 30.0 GHz KA2: 30.0 - 31.0 GHz KA3: 27.0 - 30.0 GHz
Output Power (for load VSWR ≤ 1.5:1)	TWT Power	PEAK P1&P2: 58.13 dBm (650 W) CW P1: 55.44 dBm (350 W) / P2: 56.99 dBm (500 W)
	HPA Flange Power	PEAK P1&P2: 57.52 dBm (565 W) CW P1: 54.84 dBm (305 W) / P2: 56.38 dBm (435 W)
Gain		≥ 70 dB
Gain Variation, 500 MHz, ΔG _{500MHz}		≤ 1.2 dB peak-peak
Gain Variation, 1000 MHz, ΔG _{1000MHz}		≤ 2.5 dB peak-peak
Slope, ΔG _{SLOPE}		± 0.04 dB/MHz max
Gain Stability vs. Time		± 0.25 dB max / 24hrs @ constant drive and temperature
Gain Stability vs. Temperature		± 1.0 dB max / 24hrs @ constant drive and frequency
Adjustment range, G _{ADJ}		30.0 dB typical
Adjustment step size		0.1 dB
AM/PM		≤ 2.5°/dB No Linearizer up to 7dB OPBO / ≤ 2.0°/dB With Linearizer up to 4dB OPBO
Noise Power Ratio (NPR)		≤ -19 dBc at 215W flange output power / ≤ -25 dBc at 135W with optional linearizer
Inter-modulations (IMD) 2-tone		≤ -23 dBc at total output power of 100.7W / ≤ -25 dBc at 215W with optional linearizer
Spectral Re-growth (SR)		≤ -30 dBc
Noise power	Transmit band	≤ -70 dBW/4 kHz
	Receive band	≤ -150 dBW/4 kHz (≤ 21.2 GHz)
Spurious @ P _o ≤ MLP		≤ -60 dBc
Residual AM		≤ -50 dBc, f < 10kHz ≤ -20(1.5+LOG(frequency KHz))dBc, f = 10KHz to 500KHz ≤ -85 dBc >500KHz
Phase Noise		10dB below IESS requirement ≤ -50 dBc max, AC fundamental ≤ -47 dBc max, Sum of all spurs
Group Delay (any 80 MHz)	Linear	0.01 nsec/MHz, max
	Parabolic	0.005 nsec/MHz ² , max
	Ripple	0.5 nsec/Peak-Peak, max
Input VSWR (Return Loss)		≤ 1.3:1 (17.7 dB)
Output VSWR (Return Loss)		≤ 1.3:1 (17.7 dB)
Load VSWR (Full perf.)		≤ 1.5:1 (14.0 dB)
Load VSWR (no damage)		≤ 2.0:1 (9.5 dB)
Harmonic 2 nd & 3 rd		≤ -60 dBc

*Note: Other frequency bands are available including BUC options covering 1GHz, consult ETL Systems for details.

Peak/output power and frequency range must be selected at time of purchase, as these options are TWT dependent and cannot be changed in the field.



Electrical	
AC Input Voltage	100-240 VAC \pm 10%, single phase 47-63 Hz
Power consumption	P1: 1200 VA typical , 1400 VA maximum P2: 1300 VA typical, 1500 VA maximum
Power factor	0.98 typical 0.96 minimum

Physical	
Dimensions (request outline)	52 cm deep x 26 cm width x 26 cm height
Weight	21 kg typical
Cooling	Liquid Cooled
RF Input	WR-28 (Optional WR-34)
RF Output	WR-28 (Optional WR-34)
RF Sample port	2.9mm SMA Female
AC Input	Amphenol C016 20C003 200 12
Ethernet	RJF71B (IP67 RJ45 Connector)
M&C Connector	PT07E18-32S (MS3114E-18-32S)

Environmental	
Operating temperature	-40°C to +60°C (out of direct sunlight) -40°C to +55°C (direct sunlight)
Storage temperature	-54°C to +71°C
Relative humidity	100% condensing
Altitude	12,000 ft. with standard adiabatic de-rating of 2°C/1000 ft., operating 50,000 ft., non-operating
Shock	15 g peak, 11mSec, 1/2 sine
Vibration	3.2 g rms, 10-500 Hz
Acoustic Noise	65 dBA @ \geq 3 ft. from amplifier

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.