


# 32 x 32 Enigma Ensign Extended L-band Fan-in Fan-out Matrix

## With 0-10dB variable gain

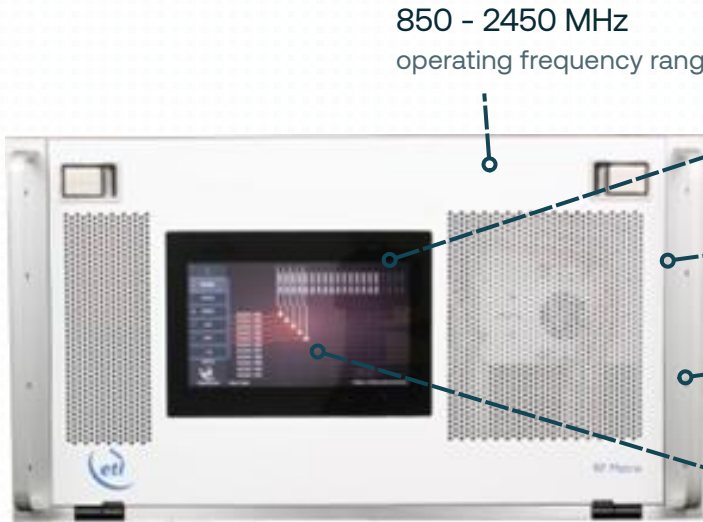

850 - 2450 MHz  
operating frequency range

**Switching flexibility**  
with the ability to split and combine feeds at the same time (FIFO)

**Suitable for HTS applications**  
due to extended bandwidth

**Compact**  
up to 32 inputs x 32 outputs  
in a 6U high chassis

**Upgraded local control & monitoring**  
via front panel capacitive touchscreen




**Expansion**  
in single increments or with additional matrix  
modules for larger systems

**Self diagnostics**  
with continuous monitoring  
of amplifiers, CPUs & PSUs

**Resilience**  
from dual redundant power supplies & CPU modules

**Minimal impact from failure**  
with hot-swap single input & output  
RF cards, dual power supplies & dual  
CPUs, fans

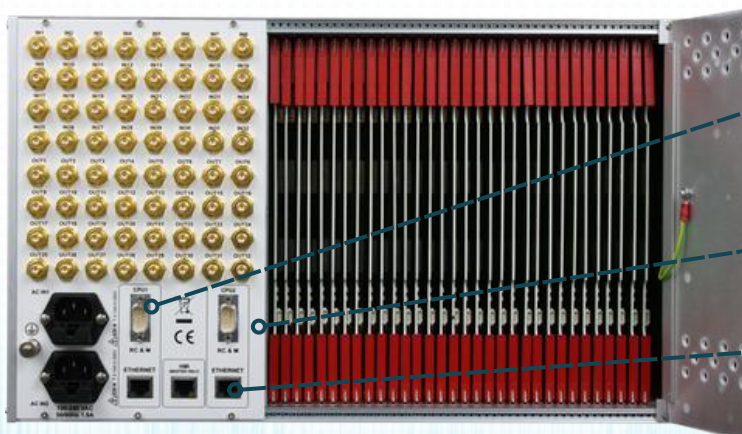

**Dry contact alarm port**  
for amplifier & power supply status

**Future proof secure protocols**  
with SNMPv3 & HTTPS

**Remote control & monitoring**  
via RJ45 Ethernet port with SNMP & web  
browser interface

RF Parameters					
Capacity		32 inputs x 32 outputs, fully populated			
Routing		Fan-in Fan-out (FIFO - split and combine feeds at the same time)			
Frequency Range		850-2450 MHz (Extended L-band)			
Gain	Max.	10±1 dB Typical, mean across band			
	Min.	0±1 dB Typical, mean across band			
Gain Control		0 to +10 dB in 0.25 dB steps. +5 dB independently settable at each input and output.			
RF Connectors		50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type
		All ports DC blocked			
Gain Flatness	Full band	±1.25 dB	±1.25 dB	±1.5 dB	±1.5 dB
	Any 36MHz	±0.5 dB	±0.5 dB	±0.5 dB	±0.5 dB
Input Return Loss	Typical	18 dB	18 dB	16 dB	16 dB
	Minimum <2150MHz	14 dB	14 dB	10 dB	10 dB
	Minimum >2150MHz	12 dB	12 dB	8 dB	8 dB
Output Return Loss	Typical	18 dB	18 dB	16 dB	16 dB
	Minimum <2150MHz	14 dB	14 dB	10 dB	10 dB
	Minimum >2150MHz	12 dB	12 dB	8 dB	8 dB
Isolation (Min. between any 2 ports)	Input-Output	60 dB			
	Input-Input	75 dB			
	Output-Output	75 dB			
Group Delay		≤ 1 ns, across operational bandwidth			
Noise Figure	0dB Gain	18 dB Typ.		With one input routed to one output.	
		20 dB Max.			
	10dB Gain	12 dB Typ.			
		14 dB Max.			
1dB GCP	0dB Gain	-3 dBm		Output power	
	10dB Gain	+3 dBm			
OIP3	0dB Gain	10 dBm Typ.			
	10dB Gain	15 dBm Typ.			
OIP2	Typical	23 dBm Typ. at 0dB gain			
Switching Time		< 50ms from receipt of a command to implementation of path change			
Input RF Power		+ 20 dBm		Absolute maximum	



System Control		
Local Control	Via Front Panel capacitive touchscreen	
Remote Control & Monitoring	Ethernet port via RJ45 10BaseT/100 BaseTx. TCP/IP, SNMPv3, HTTPS & Web browser interface	
Alarms	Dry contact (D-type) & Ethernet (RJ45) for PSU & Amp. status	
Power		
PSU Power	85-264Vac 50-60Hz	Fused 2A
AC Consumption	150W	Max. consumption at steady state
PSU	Dual redundant & alarmed	Diode OR. Hot swappable
Hot-swap PSU	Yes	
CPU	Dual redundant	Hot swappable
Input cards	Hot swap	Failure affects only one input port
Output cards	Hot swap	Failure affects only one output port
MTTR	20 mins, 15 mins to retrieve spare part and 5 mins to replace	Applies to LRUs only and assumed in-house stock
MTBF	Chassis	271,444
	Combiner card	317,227
	Divider card	317,227
Chassis excludes HMI & RF cards		
Environmental		
Operating temperature	0 to 45°C	
Storage temperature	-20°C to +75°C	
Location	Indoor use only	
Humidity	20 to 90% non-condensing	
Altitude (operational)	2,000 feet AMSL (Above Mean Sea Level)	
Altitude (storage)	3,000 feet AMSL (Above Mean Sea Level)	
Physical		
Dimensions	6U high x 560mm deep x 19" wide	
Weight	35 kg, fully populated	
Colour	RAL9003—White (Semi-Matte)	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.