RF Components

Variable Rotary Attenuator

DC - 8 GHz

Model Number:
435001

- Attenuation Range 0 - 69dB
- Settable in 1dB steps

With RF connectors:

- 50 Ω SMA Type

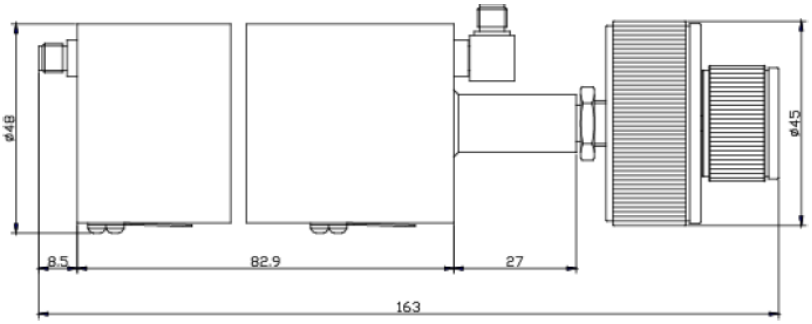

Attenuator

RF Parameters	
435001-02-S5S5	
Frequency Range	DC - 8 GHz
RF Connectors	50Ω type SMA
Attenuation (dB)	0-69 dB in 1dB steps
Attenuation Accuracy (dB)	±0.8dB (0~9dB) ±1.0dB(10~19dB) ±1.5dB(20~49dB) ±2.0dB(50~70dB)
Mean Insertion Loss (dB)	≤1.0
VSWR	Max 1.5
Power Rating	5W
Temperature Range	0 to +55'C

Broadcast

Marine Oil & Gas

SNG & VSAT

Satellite Teleport