




Wideband Attenuator


DC-12.4 GHz

Available with:

- 1,3,6,10,20 or 30dB Fixed Attenuation
- 50 Ω SMA Male / Female or N-Type Male / Female

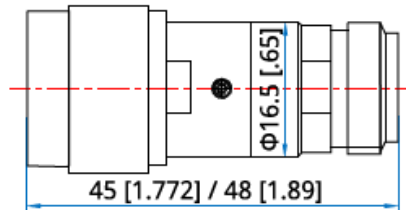

N-Type

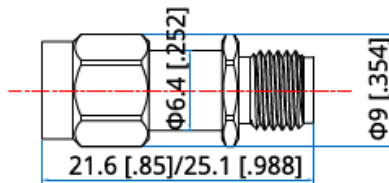

SMA

Attenuator

| RF Parameters | | | | | | | | | | | | | |
|----------------------|------------------------|-----|-----|-----------|------|------|---------------------------|-----|-----|------|------|------|-----|
| ATTXXKXP-435023-XXXX | S4S5 | | | | | | N4N5 | | | | | | |
| Frequency Range | DC - 12.4 GHz | | | | | | | | | | | | |
| RF Connectors | 50 Ω SMA Male / Female | | | | | | 50 Ω N-Type Male / Female | | | | | | |
| Attenuation | 1dB | 3dB | 6dB | 10dB | 20dB | 30dB | 1dB | 3dB | 6dB | 10dB | 20dB | 30dB | |
| Accuracy | -0.4/+0.5 | | | -0.6/+0.5 | | | -0.8/+0.7 | | | 0.6 | | 0.7 | 0.8 |
| Average Power | 2 W @ 25°C max | | | | | | | | | | | | |
| Peak Power | 20 W | | | | | | 500 W | | | | | | |
| Max VSWR | 1.3, 1.25 @ 60dB | | | | | | 1.3 | | | | | | |
| Temperature | -55 ~ +125°C | | | | | | | | | | | | |

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport

