




2W Fixed Attenuator

DC - 18GHz

- DC-18GHz
- Power handling 2W
- SMP Male to Female connectors
- Full detent

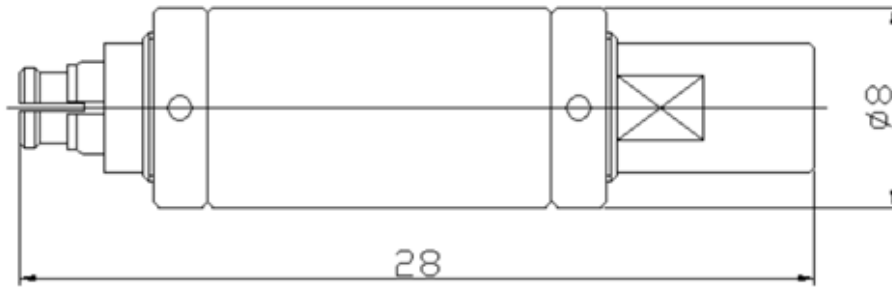

Outline Drawing:

All dimensions in mm (inches)

Outline tolerance $\pm 5\%$

General Specification	
Frequency	DC-18GHz
VSWR	≤ 1.25
Power Handling	2W
Impedance	50 Ω
Attenuation accuracy	$\pm 1\text{dB}$
Connector Type	SMP Male to Female
Attenuation*	1, 3, 5, 6, 10, 15 and 20dB
Operating Temperature	-45°C ~ +100°C

*Ordering guide	
ATT01	1dB
ATT03	3dB
ATT05	5db
ATT06	6dB
ATT10	10dB
ATT15	15dB
ATT20	20dB

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

