




RF Components

2-Way C-Band Passive Splitter/Combiner DC-6GHz

Model Number:
COM02CXP-279018


Available with RF connector options:

- 50Ω SMA Female

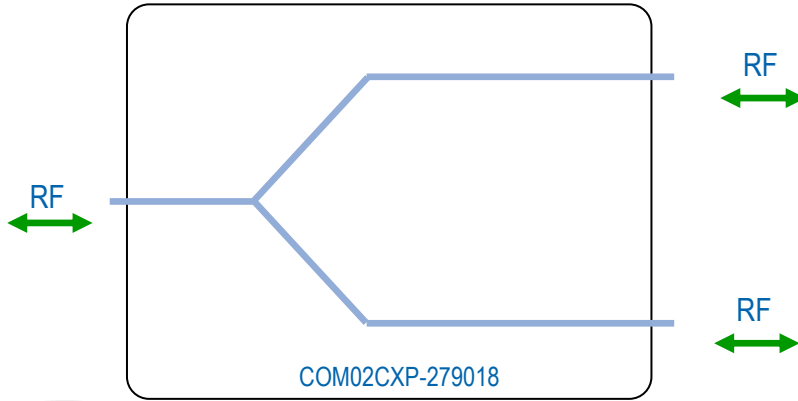

Passive

Physical Dimensions (± 0.3mm)

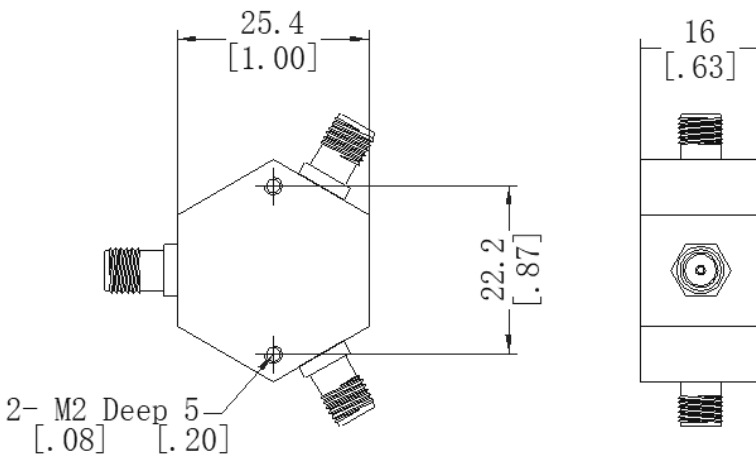

RF Parameters	
COM02CXP-279018	S5S5
Frequency Range	DC - 6 GHz
RF Connectors	50Ω SMA Female
Insertion Loss (dB) Max	6±1.2
Input VSWR	1.30:1
Output VSWR	1.30:1
Isolation (dB)	6
The given Insertion Loss specified is the loss above the theoretical limit for a lossless divider	

Environmental	
Operating Temperature	-45°C to +75°C
Storage Temperature	-45°C to +85°C
Location	Indoor

Max Operating Parameters	
Power Handling	2 Watt (Forward Power)
Shock	20G for 11msec half sine wave, 3 axis both directions

! Operation beyond these limits may cause instantaneous and permanent damage.

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport

