



## 16-way Single Active Dextra Series L-band

**Splitter** with 10 MHz pass to port 1, dual redundant amplifiers (OPT-R) & DC pass to port 1 (OPT-D)

## **Typical applications:**


- Satellite operators, VSAT, teleports & broadcasters.
- High resilience RF distribution where optimum satellite signal quality is required.
- 850-2450MHz to cover Ka-band & HTS applications.
- Redundancy applications for remote satellite teleports.

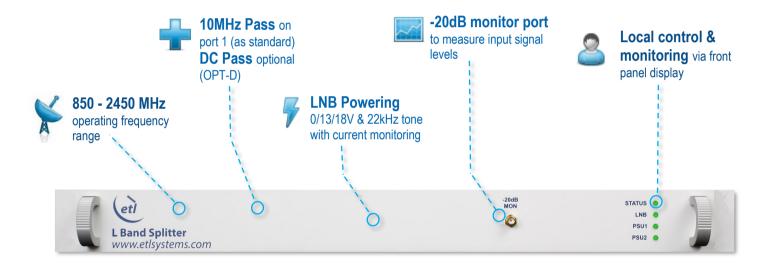

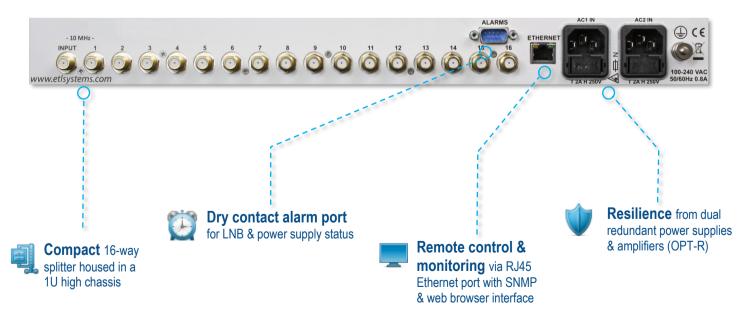

















## Model Number: D0116S1ULA-22454-XXXX

## Technical specifications and operating parameters

RF Parameters					
Capacity		16 way Splitter			
Front Panel Monitor		50Ω SMA -20dB, 16dB return loss			
Frequency Range		850-2450 MHz (Extended L-band)			
RF Connectors & Impedances		50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type
Gain (dB)		0±1.0 Mean across band			
Flatness	Full Band	±0.8 dB	±0.8 dB	±1.0 dB	±1.0 dB
	Any 36MHz	±0.25 dB	±0.25 dB	±0.3 dB	±0.3 dB
Input Return	Typical	20 dB	20 dB	20 dB	20 dB
Loss	Minimum	16 dB	16 dB	16 dB	16 dB
Output Return Loss	Typical	21 dB	21 dB	21 dB	21 dB
	Minimum	16 dB	16 dB	16 dB	16 dB
Group Delay	Full Band	2 ns maximum			
Variation	Any 36MHz	1 ns maximum			
Amplification		Single path amplifier	Standard Model		
Options		Dual redundant amplifier Selectable hot or cold standby, 1:1 redundancy with auto switch-over based on amplifier current monitoring.  OPT-R			
		DC pass port 1 to common port.			OPT-D
		Dual redundant amplifier and DC pass port 1.			OPT-RD
10MHz Insertion Loss		<1 dB Port 1 to common only		у	
Isolation	Typical	28 dB	28 dB	28 dB	28 dB
850-2250 MHz	Minimum	24 dB	24 dB	24 dB	24 dB
Isolation	Typical	28 dB	28 dB	24 dB	24 dB
2250-2450 MHz	Minimum	24 dB	24 dB	22 dB	22 dB
Noise Figure (typical)	50Ω	10 dB			
	75Ω	12 dB			
Output 1dB GCP		0 dBm			
OIP3		+10 dBm			
OIP2		+30 dBm			
3rd Order Intermodulation Level		-40 dBc With 2 equi-magnitude -13dBm carriers. Total power -10dBm.			arriers. Total
Input RF Power		16 dBm Absolute maximum			
In Band Spurious	1	<-80 dBm			

Environmental		
Operating Temperature	0 to 50°C	
Location	Indoor use only	
Storage Temperature	-20°C to +75°C	
Humidity	85% non-condensing	
Altitude	10,000 feet AMSL (above mean sea level)	

Power				
PSU Power	85-264Vac 50/60Hz	Fused 2A		
AC Consumption	<20 W	At steady state. With max rated LNB current supplied		
LNB Power	0/13V/18Vdc, 500mA max via common (RF in) port, over current protected at 800mA typical. 22kHz tone on/off enabled/disabled through comms. Monitored, alarms and status available through comms. Thresholds settable by user through comms.	Controlled by Ethernet		
PSU Redundancy	Dual redundant PSUs with dual IEC inlets	Diode OR. Not hot swap		

System Control			
Communication	RJ45 port with 10baseT/100baseTX Ethernet offering web browser access, SNMP, and ETL Proprietary TCP Protocol.		
Alarms	Dry contact (D-type) & Ethernet (RJ45) for PSU & LNB supply. Full status and alarms are also available via the Ethernet interface		
Display	Tri colour LEDs to indicate PSU, LNB supply and amplifier status on front panel.		

Physical		
Dimensions	1U high x 350mm deep x 19" wide	
Weight	3.05 kg	
Colour	RAL9003-White (Semi-Matte)	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE TELEPHONE +44 (0)1981 259020

EMAIL info@etlsystems.com

FACSIMILE +44 (0)1981 259021

www.etlsystems.com









