




Model Number:
DIV03B2A-2404

RF Components

3-way Broadband Active Splitter

50 to 2150 MHz

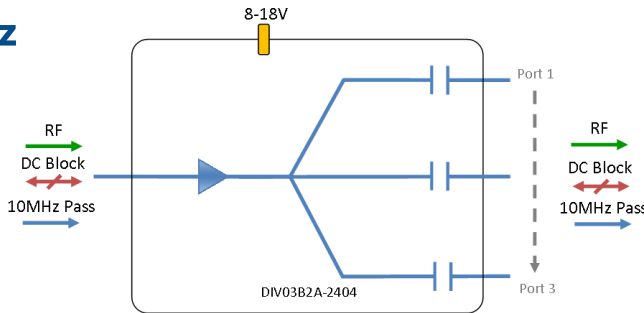

- Covers IF, and L-band
- Passes 10MHz
- All RF ports are DC blocked
- Integral regulator
- Requires a DC voltage

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type

8-18V
External DC
powering

Compact
Housed in
rugged compact
enclosure

50 to 2150 MHz
Operating frequency
range.

**Flexible
Mounting**
Tapped screw &
through hole
mounting options



RF Parameters					
DIV03B2A-2404 -XXXX	S5S5	N5N5	B5B5	B7B7	F7F7
Frequency Range	50 to 2150 MHz				
RF Connectors	50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type
Mean Gain (dB)	0±1.0	0±1.0	0±1.0	0±1.0	0±1.0
Flatness ± (dB)	0.6	0.6	0.6	0.7	0.7
Input Return Loss (dB)	Typ.	17	17	16	14
	Min	15	15	14	8
Output Return Loss (dB)	Typ.	25	25	25	14
	Min	18	18	18	8
Output P1dB GCP* (dBm)	Typ.	5	5	5	5
	Min	2	2	2	2
Isolation (dB)	Typ.	16	16	16	16
Output IP3 (dBm)	Typ.	14	14	14	14
Noise Figure (dB)	Typ.	10	10	10	10
Amplitude Balance (dB)		≤0.3	≤0.3	≤0.3	≤0.4
Phase Balance (Φ)		≤5°	≤5°	≤5°	≤5°

*GCP (Gain Compression Point)

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport







RF Components

Model Number:
DIV03B2A-2404
3-way Broadband Active Splitter

Technical specifications and operating parameters

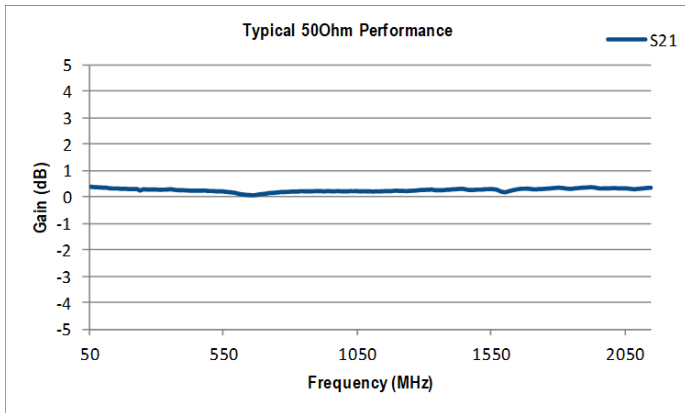

Gain (dB)

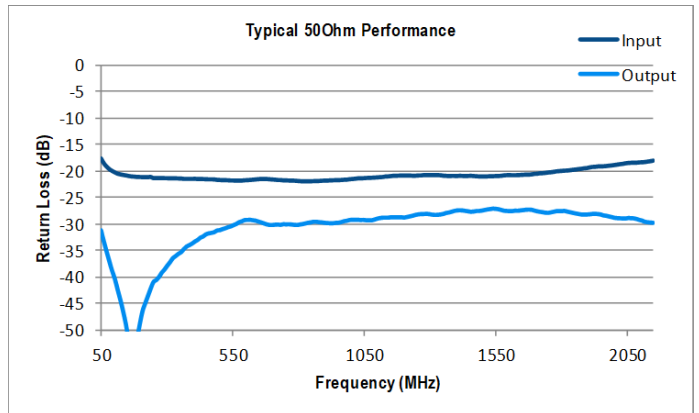


Return Loss (dB)

Environmental		
Operating Temperature		0°C to +45°C
Storage Temperature		-20°C to +75°C
Location		Indoor use Only
Humidity	Max	85% non-condensing
Altitude	Max	10,000 feet

Max Operating Parameters		
Input RF Power		+21 dBm (126mW)
DC Voltage		35V on any RF port
DC Current	Max	N/A
DC Consumption		100mA Max, 80mA typical

! Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions (mm)

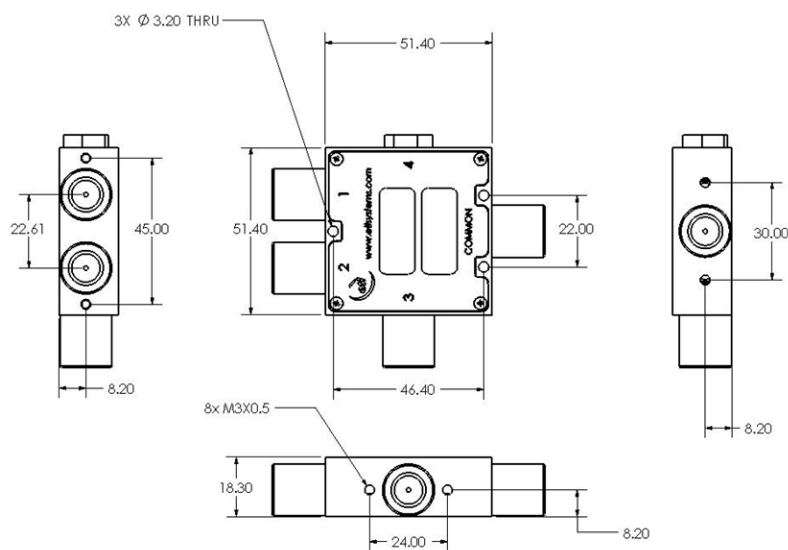

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

