




RF Components

Model Number:
DIV04L1A-2440

4-way L-band Active Splitter

850-2150 MHz

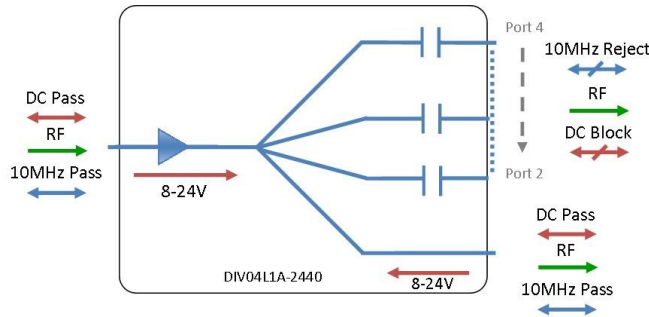

- 10MHz/DC pass on port 1 only
- Unity gain
- Requires 8-24V inline DC bias on port-1 or the common port

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type

8-24V
Injected DC
powering

850-2150 MHz
Operating frequency
range.

Compact
Housed in
rugged compact
enclosure

**Flexible
Mounting**
Tapped screw &
through hole
mounting options



RF Parameters						
DIV04L1A-2440-XXXX	S5S5	N5N5	B5B5	B7B7	F7F7	
Frequency Range	850—2150 MHz					
RF Connectors	50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type	
Mean Gain (dB)	0±1.0	0±1.0	0±1.2	0±1.5	0±1.5	
Flatness ± (dB)	0.5	0.5	0.5	1.2	1.2	
Input Return Loss (dB)	Typ.	16	15	15	12	12
	Min	12	12	10	8	8
Output Return Loss (dB)	Typ.	18	18	15	12	12
	Min	12	12	10	8	8
Output P1dB GCP** (dBm)	Typ.	5	5	5	5	5
	Min	2	2	2	2	2
Isolation (dB)	Typ.	16	16	16	16	16
Output IP3 (dBm)	Typ.	13	13	13	13	13
Noise Figure (dB)	Typ.	9	9	9	9	9

10MHz Insertion loss is 0±3dB
 10MHz Rejection is 60dB*
 *To ports which are applicable
 **GCP (Gain Compression Point)

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport







RF Components

Model Number:
DIV04L1A-2440
4-way L-band Active Splitter


Technical specifications and operating parameters

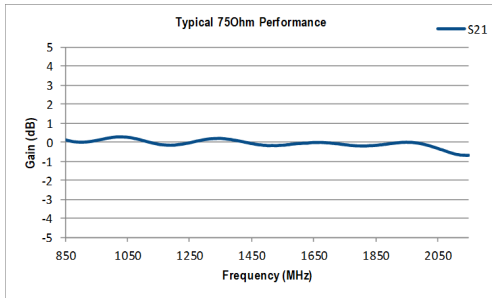

Gain (dB)

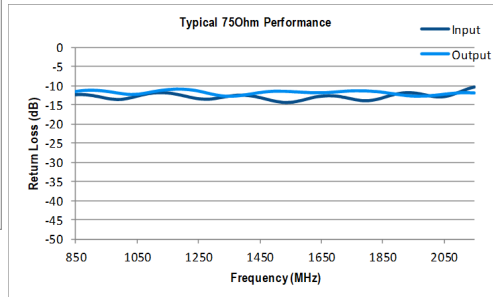

Return Loss (dB)

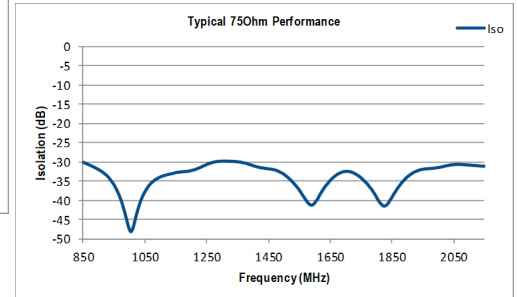


Isolation (dB)

Environmental		
Operating Temperature		0°C to +60°C
Storage Temperature		-20°C to +75°C
Location		Indoor use Only
Humidity	Max	85% non-condensing
Altitude	Max	10,000 feet

Max Operating Parameters		
Input RF Power		+21 dBm (125mW)
DC Voltage		35V on any RF port
DC Current	Max	@ 21°C 3A Max @ 60°C 2A Max
DC Consumption		100mA Max, 80mA typical

! Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions (mm)

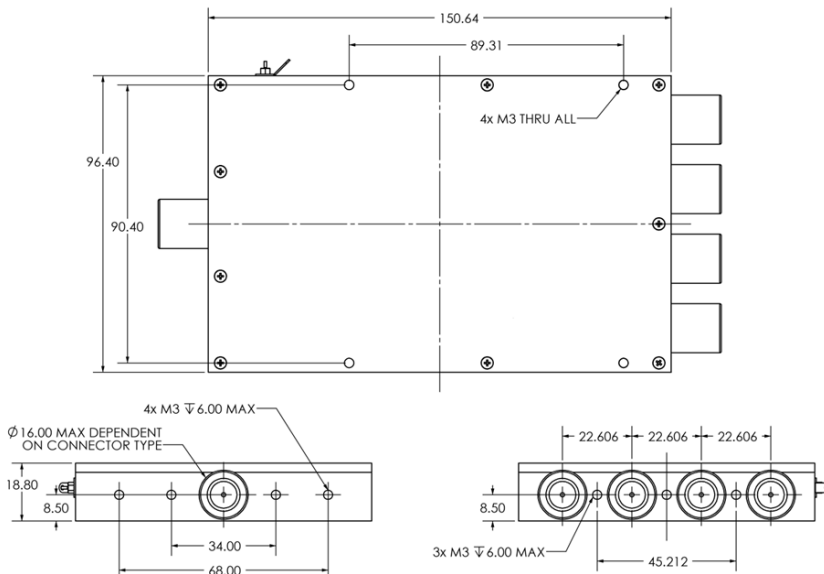

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

