

## Model Number: **EQUL1P-4518**


- Reciprocal device
- DC blocked between the two ports
- 8dB positive slope

Available with RF connector options:

- 75 Ω BNC
- 75 Ω F-type.

**Compact** Housed in

**L-band Passive Equaliser** 



rugged compact enclosure

\*\*Www.et/systems.com\*\*

\*\*B50-2150 MHz\*\*

Operating frequency range. L-Band ready

Flexible
Mounting
Tapped screw &
through hole
mounting options

RF Parameters				
EQUL1P-4518-xxxx		B7B7	F7F7	
Frequency Range		850 - 2150 MHz		
RF Connectors		75Ω BNC	75Ω F-Type	
Mean Insertion Loss (dB)	Тур.	5.5	5.5	
	Max.	8.0	8.0	
Slope Positive (dB)		8.0 ± 1.7	8.0 ± 1.7	
Input Return Loss (dB)	Тур.	12	10	
	Min	8	8	
Output Return Loss (dB)	Тур.	12	10	
	Min	8	8	












## **Model Number: EQUL1P-4518** L-band Passive Equaliser

Environmental				
Operating Temperature		0°C to +65°C		
Storage Temperature		-20°C to +75°C		
Location		Indoor use Only		
Humidity	Max	90% non-condensing		
Altitude	Max	10,000 feet		

Max Operating Parameters			
Input RF Power	+37 dBm (5W)		
DC Voltage	28V		
DC Current			
DC Consumption			

Operation beyond these limits may cause instantaneous and permanent damage.

## **Physical Dimensions (mm)**

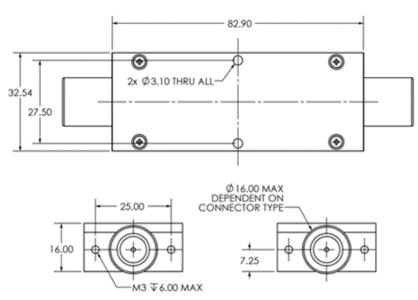

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.







