



RF Components

Model Number:  
**F-BPKX-7073**


# Ku-band Cavity Filter

10950-11700 MHz

Available with RF connector s:  

- SMA 50 ohms

### Physical Dimensions (±0.3 mm)

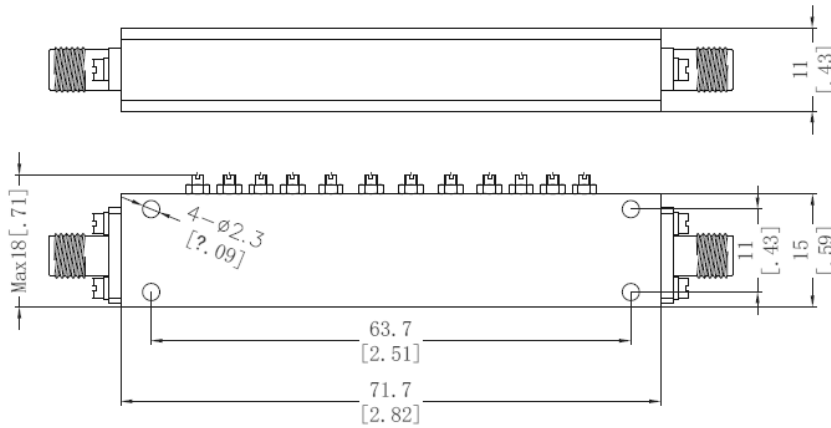

# Filter

Specification	
RF Connectors	SMA 50 ohm
Frequency (MHz)	10950-11700 MHz
Insertion Loss (dB)	≤ 3.0
Return Loss (dB)	≥ 16 dB
Rejection	≥60dB @ 10375 & ≥60dB @12275 MHz
Power Handling	20 W max

Environmental	
Operating Temperature	-40 °C to +70°C
Location	Indoor use Only
Humidity	Max 95% non-condensing
Altitude	Max 10,000 feet Operational 60,000 feet 1.0 Psi Storage/Transport

### Broadcast



### Marine Oil & Gas



### SNG & VSAT



### Satellite Teleport

