




Model Number:
F-BPSX-7077

RF Components

S-Band Dielectric Bandpass Filter

2324.25 - 2328.25 MHz

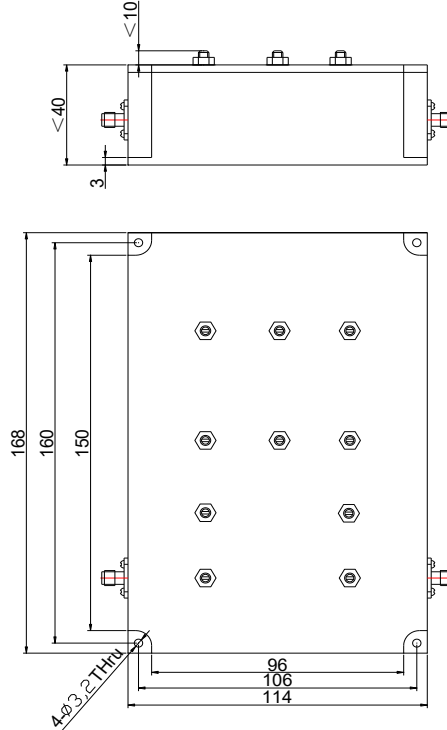

Filter

RF Parameters	
F-BPXX-7066	S5S5
Frequency Range MHz	2324.25 - 2328.25
RF Connectors	SMA
Insertion Loss (dB)	≤ 1.3
Return Loss (dB)	≥ 14
Rejection	≥ 45 @ 2320 MHz ≥ 45 @ 2332.5 MHz ≥ 30 @ 2600-6500 MHz
Max RF Power	40
Ripple in Band (dB)	≤ 0.5

Environmental	
Operating Temperature	-40°C to +65°C

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport

