




Model Number:  
**F-BSLX-7096**

RF Components

# L-band Band Stop Filter

## DC-2500 MHz

Physical Dimensions ( $\pm 0.3\text{mm}$ )

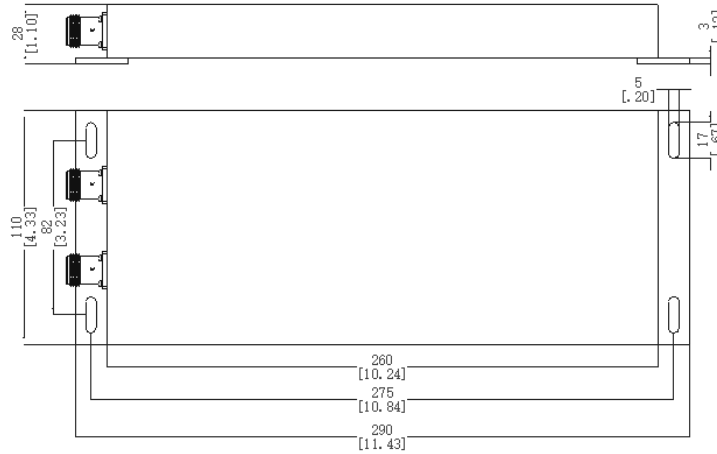

# Filter

RF Parameters	
F-BSLX-7096	S5S5
Frequency Range	DC—2500 MHz
Band Pass	DC -840 MHz & 1000-2500 MHz
Band Stop	880-960 MHz
RF Connectors	50Ω N-type Female
Insertion Loss (dB)	$\leq 3.0\text{dB}$
VSWR (dB) Max	1.8:1
Rejection	$\geq 60\text{ dB@}880\text{-}960\text{ MHz}$
Max RF Power	200 W

Environmental	
Operating Temperature	-40°C to +70°C
Storage Temperature	-55°C to +85°C
Location	For Indoor use

**Broadcast**



**Marine Oil & Gas**



**SNG & VSAT**



**Satellite Teleport**

