




4-way L-band VSAT TX-RX Hybrid Splitter & Combiner

with LNB powering, BUC powering and 10MHz Source

Typical applications:

- GSM Backhaul
- VSAT networks
- SNG and Outside Broadcast Trucks
- Teleports with limited rack space

ETL's VSAT TX-RX module is an L-band hybrid splitter and combiner shelf designed to power and reference VSAT terminals, as well as facilitate the use of multiple modems.

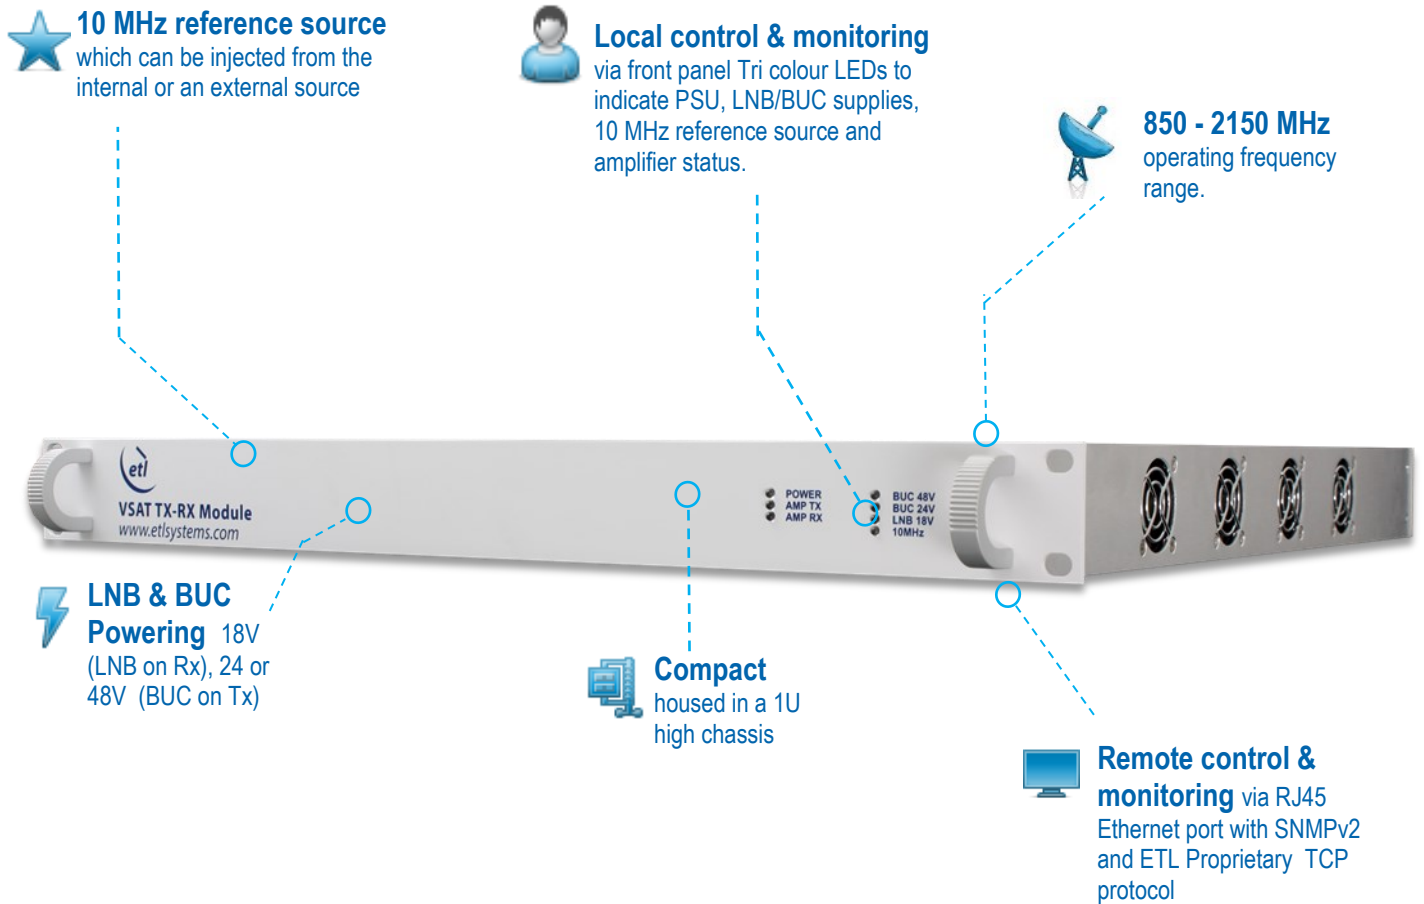



Technical specifications and operating parameters

RF Parameters			
		RX Side	TX Side
Capacity		1 in x 4 out Splitter	4 In x 1 out Combiner
Frequency Range		850-2150 MHz (L-band)	
Connector & impedances		50Ω SMA, 50Ω BNC, 50Ω N-Type, 75Ω BNC & 75Ω F-type	
Insertion gain	Passive	-10 dB ±1 dB (Nominal mean across band)	
	Active	3 dB ±1 dB (Nominal mean across band)	
Flatness over 850-2150 MHz	Passive	±2 dB	
	Active	±1 dB	
Return loss	Input	50Ω SMA, 50Ω BNC, 50Ω N-Type: 15 dB Typical / 8 dB Minimum 75Ω BNC & 75Ω F-type: 12 dB Typical / 7 dB Minimum	
	Output	50Ω SMA, 50Ω BNC, 50Ω N-Type: 15 dB Typical / 8 dB Minimum 75Ω BNC & 75Ω F-type: 12 dB Typical / 7 dB Minimum	
1 dB Compression Point		+ 9 dBm Typical + 7 dBm Worst Case	+ 14 dBm Typical + 12 dBm Worst Case
OIP3		+ 24 dBm Typical + 20 dBm Worst Case @2150MHz	+ 28 dBm Typical + 25 dBm Worst Case @2150MHz
Noise Figure		11 dB Typical 14 dB Worst Case	17 dB Typical 20 dB Worst Case
Input RF Power		+16 dBm (Absolute Maximum)	
LNB / BUC Power		18V DC, 0.5A DC via common (RF in) port (Always on)	24V 3.2A or 48V 4.15A DC via common (RF out) port (Always on, user selectable)
10 MHz tone		Always supplied via common (RF in) port , Always on, selectable internal/external	
10 MHz Source			
10MHz Reference Source		Internal / external (via BNC on rear panel) Selectable internally/externally, always supplied to both Rx & Tx sides	
Frequency		10MHz (Factory setting is to ± 1ppm, ± 10Hz)	
Output Level		-3.5 ±2 dBm (Tx & Rx ports terminated) , Web browser provides indicative measurements	
		-3.5 ±3 dBm (all conditions) , Web browser provides indicative measurements	
10MHz Insertion Loss		7.5dB ± 2dB (when 10MHz injected from external port)	
Output Type		Sine Wave	
Harmonic & Spuri Levels		2nd Harmonic Level: <- 60 dBc (typically 70 dBc)	3rd Harmonic Level: <- 55 dBc (typically 60 dBc) All other spuri: <- 65 dBc
Internal Reference		10MHz Sine Wave Ovenised Crystal Oscillator	
Frequency Stability Over Temperature		±1 x 10 ⁻⁸ (0 to +55°C)	
Reference Source Ageing		±5 x 10 ⁻⁸ / year	
Reference Source Phase Noise		<-85 dBc / Hz @ 1Hz	<-115 dBc / Hz @ 10Hz <-140 dBc / Hz @ 100Hz <-150 dBc / Hz @ 1000Hz <-155 dBc / Hz @ 10000Hz
Warm up time		<2 minutes At 25°C to within <±1 x 10 ⁻⁷	

Environmental		
Operating temperature	0 to 50° C	
Location	Indoor use only	
Storage temperature	-20° C to +75° C	
Humidity	85% non-condensing	Relative Humidity
Altitude	10,000 feet AMSL	Above Mean Sea Level

System Control	
Alarms	Full status and alarms are also available via the Ethernet interface.
Local control & monitoring	Front panel Tri colour LEDs to indicate PSU, LNB/BUC supplies, 10MHz and amplifier status.
Remote control Monitoring	RJ45 port with 10baseT/100baseTX Ethernet offering web browser access, SNMPv2, and ETL Proprietary TCP Protocol

Power		
Power Supply	85-264Vac 50/60Hz	Single power supply and mains inlet (with on/off switch built into the inlet)
AC consumption	<35W	At steady state (Excludes BUC/LNB load)

Physical	
Dimensions	1U high x 450mm deep x 19" wide
Weight	6.7 kg
Colour	RAL9003 - White (Semi-Matte)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED
Coldwell Radio Station
Madley
Hereford
England HR2 9NE

TELEPHONE
+44 (0)1981 259020

EMAIL
info@etlsystems.com

FACSIMILE
+44 (0)1981 259021

WEB
www.etlsystems.com

