RF Components

Model Number:
ISO01FXP-7516

IF-Band Isolator

170-180 MHz

Available with RF connector s:
- 50 Ω N-type

Physical Dimensions (±0.3mm)

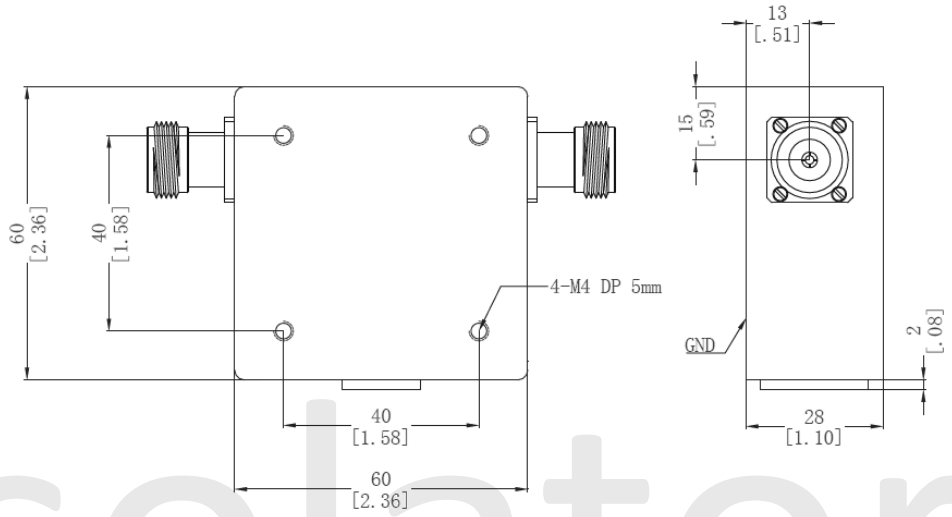

Isolator

Specification	
Connector Type	50 Ohm N-Type Female
Frequency Range	170-180 MHz
Insertion Loss (dB)	≤ 0.6
Isolation (dB)	≥ 20
VSWR	≤ 1.25:1
Power Rating	5W / AV : 100W / FW : 30W RV
Direction	Clockwise

Environmental		
Operating Temperature		-30˚C to +70˚C
Location		Indoor use Only
Humidity	Max	85% non-condensing
Altitude	Max	10,000 feet

Broadcast

Marine Oil & Gas

SNG & VSAT

Satellite Teleport