



ETL Systems

Excelling in RF Engineering


Model Number:
NGM-105-xxxx

32 x 32 Enigma 50-2450 MHz Distributive Switch Matrix / Router

4th generation Enigma matrix with enhanced RF performance including variable gain 0 dB to +10dB settable per output.

Typical applications:

- RF content acquisition for TVRO & IPTV headends
- Signal monitoring of satellite traffic
- Remote controlled unmanned satcom sites

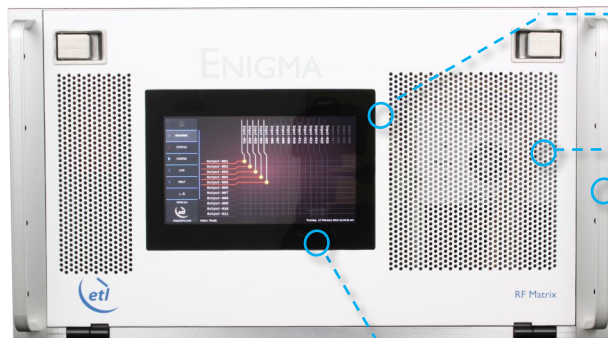

50 - 2450 MHz
operating frequency range



Suitable for HTS applications due to extended bandwidth



Upgraded local control & monitoring via front panel capacitive touchscreen



Compact up to 32 inputs x 32 outputs in a 6U high chassis



Self diagnostics with continuous monitoring of amplifiers, CPU's & PSU's




Expansion in single increments or with additional matrix modules for larger systems



Minimal impact from failure with hot-swap single input & output RF cards, dual power supplies & dual CPU's, fans



Resilience from dual redundant power supplies & CPU modules

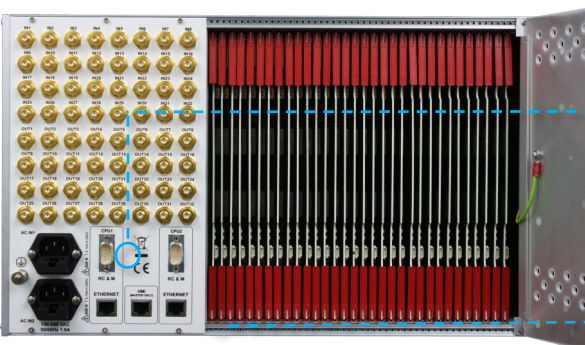

Dry contact alarm port & serial communications for amplifier & power supply status



Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface





Technical specifications and operating parameters

RF Parameters					
Capacity	32 inputs x 32 outputs, fully populated				
Routing	Distributive, non-blocking	Any input can be connected to any number of outputs			
Frequency Range	50-2450 MHz				
Gain	0±1 Typical, mean across band				
Gain Control	0 to +10 in 0.5dB steps	Settable at each output			
RF Connectors	50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type	
	All ports DC blocked				
Gain Flatness	Full Band	±1 dB	±1 dB	±1.5 dB	±1.5 dB
	Any 36MHz	±0.25 dB	±0.25 dB	±0.5 dB	±0.5 dB
Input Return Loss	Typical	18 dB	18 dB	16 dB	16 dB
	Minimum	14 dB	14 dB	10 dB	10 dB
Output Return Loss	Typical	18 dB	18 dB	16 dB	16 dB
	Minimum	14 dB	14 dB	10 dB	10 dB
Isolation (Min between any 2 ports)	I/P - O/P	60 dB			
	I/P - I/P	75 dB			
	O/P - O/P	75 dB			
Group Delay	< 1.0 ns across operational bandwidth				
1dB GCP (dBm)	0dB	+3 dBm output power			
	10dB	+10 dBm output power			
Noise Figure	0dB	Typ. 20 dB, Max 22dB		Typical, 1 input routed to 1 output	
	10dB	Typ. 18 dB, Max 22dB			
Switching Time	< 50ms from receipt of a command to implementation of path change				
OIP3	0dB	Typ. 18 dBm, min 15 dBm			
	10dB	Typ. 25dBm, min 22 dBm			
OIP2	Typical	32dBm			
	Minimum	30dBm			
Input RF Power	+ 20 dBm	Absolute maximum			

System Control	
Local Control	Via Front Panel capacitive touchscreen
Remote Control	Serial (RS232 or RS422/48) and Ethernet port via RJ45 10Base T/100 BaseTx. TCP/IP, SNMP & Web browser interface.
Alarms	Dry contact (D-type) & Ethernet (RJ45) for PSU & Amp. status

Power		
PSU Power	85-264Vac 50-60Hz	Fused 2A
AC Consumption	150W	Max. consumption at steady state
LNB Power	None	
PSU	Dual redundant & alarmed	Diode OR. Hot swappable
Hot-swap PSU	Yes	
CPU Redundancy	Dual redundant	Hot swappable
Input Cards	Hot swap	Failure effects only one input port.
Output Cards	Hot swap	Failure effects only one output port.
MTTR	20 mins. 15 mins to retrieve spare part and 5 mins to replace.	Applies to LRUs only and assumed in house stock.
MTBF	Chassis	271,444
	Switch card	270,297
	Divider card	317,227
Chassis excludes HMI & RF cards		

Environmental	
Operating temperature	0 to 45°C
Storage temperature	-20°C to +75°C
Location	Indoor use only
Humidity	20 to 90% non-condensing
Altitude (operational)	10,000 feet AMSL (Above Mean Sea Level)
Altitude (storage)	30,000 feet AMSL (Above Mean Sea Level)

Physical	
Dimensions	6U high x 450mm deep x 19" wide
Weight	35 kg, fully populated
Colour	RAL9003—White (Semi-Matte)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
 Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

