


## Model Number: NSN-102-xxxx

## 32 x 32 Ensign Extended L-band Fan-In-Fan-Out Switch Matrix / Router with

0-10dB variable gain

## **Typical applications:**

- RF content acquisition for TVRO &IPTV headends
- Signal monitoring of satellite traffic
- Remote controlled unmanned satcom sites

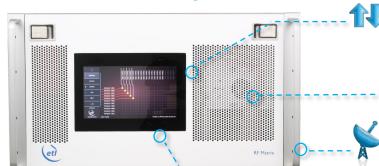

Switching flexibility

with the ability to split and combine feeds at the same time (FIFO)



0-10 dB Variable gain to balance input and output signals





Suitable for HTS applications due to extended bandwidth



Compact up to 32 inputs x 32 outputs in a 6U high chassis



**Upgraded local control** & monitoring via front panel capacitive touchscreen



Self diagnostics with continuous monitoring of amplifiers, CPU's & PSU's



Minimal impact from

increments or with additional

matrix modules for larger

**Expansion** in single

failure with hot-swap single input & output RF cards, dual power supplies & dual CPU's, fans



Resilience from dual redundant power supplies & **CPU** modules



Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface



Dry contact alarm port & serial communications

for amplifier & power supply status



**Future proof secure** protocols with SNMPv3 &















www.etlsystems.com



## Technical specifications and operating parameters

RF Parameters					
Capacity		32 inputs x 32 outputs, fully populated			
Routing		Fan-in Fan-out (FIFO)		Split and combine feeds at the same time	
Frequency Range		850-2450 MHz (Extended L-band)			
Gain	Maximum	10±1 dB		Typical, mean across band	
Gaiii	Minimum	0±1 dB		Typical, mean across band	
Gain Control		0 to + 10 in 0.25 dB steps		+5 dB independently settable at each input and output	
RF Connectors		50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type
		All ports DC blocked			
Gain Flatness	Full band	±1.25 dB	±1.25 dB	±1.5 dB	±1.5 dB
	Any 36MHz	±0.5 dB	±0.5 dB	±0.5 dB	±0.5 dB
Input	Typical	18 dB	18 dB	16 dB	16 dB
Return Loss	Minimum	14 dB	14 dB	10 dB	10 dB
Output	Typical	18 dB	18 dB	16 dB	16 dB
Return Loss	Minimum	14 dB	14 dB	10 dB	10 dB
Isolation	I/P - O/P	60 dB			
(min between	I/P - I/P	75 dB			
any 2 ports)	O/P - O/P	75 dB			
Group Delay		≤ 1 ns across operational bandwidth			
Noise	0dB Gain	Typical: 18 dB Maximum: 20 dB		Typical, 1 input routed to 1 output	
Figure	10dB Gain	Typical: 12 dB Maximum: 14 dB			
14D CCD	0dB Gain	-3 dBm		Output power	
1dB GCP	10dB Gain	+3 dBm			
OID3	0dB Gain	Typical: 10 dBm			
OIP3	10dB Gain	Typical: 15 dBm			
OIP2		Typical: 23 dBm , at 0 dB gain			
Switching Time		< 50ms		From receipt of a command to implementation of path change	
Input RF Power		+ 20 dBm Absolute maximum		um	

System Control		
Local Control	Via Front Panel capacitive touchscreen	
Remote Control	Ethernet via RJ45, 10BaseT/100BaseTx, ETL TCP/IP Protocol SNMPv3, HTTPS & built in Web Server	
Alarms	Dry contact (D-type) & Ethernet (RJ45) for PSU & Amp. status	

Power					
PSU Power		85-264Vac 50-60Hz	Fused 2A		
AC Consumption		150W	Max. consumption at steady state		
PSU		Dual redundant & alarmed	Diode OR. Hot swappable		
Hot-swap PSU		Yes			
CPU Redundancy		Dual redundant	Hot swappable		
Input Cards		Hot swap	Failure effects only one input port		
Output Cards		Hot swap	Failure effects only one output port		
MTTR		20 mins. 15 mins to retrieve spare part, 5 mins to replace.	Applies to LRUs only and assumed in house stock		
MTBF	Chassis	271,444	Chassis excludes HMI & RF cards		
	Combiner card	317,227			
	Divider card	317,227			

Environmental				
Operating temperature	0 to 45°C			
Storage temperature	-20°C to +75°C			
Location	Indoor use only			
Humidity	20 to 90% non-condensing			
Altitude (operational)	2,000 feet AMSL (Above Mean Sea Level)			
Altitude (storage)	3,000 feet AMSL (Above Mean Sea Level)			

Physical		
Dimensions	6U high x 560mm deep x 19" wide	
Weight	35 kg, fully populated	
Colour	RAL9003—White (Semi-Matte)	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy. Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE

**TELEPHONE** +44 (0)1981 259020

info@etlsystems.com

**FACSIMILE** +44 (0)1981 259021

www.etlsystems.com









