

Model Number: PSU12F125-9701-ML3


Switch Mode Power Supply

For use with ETL RF over fibre 400 series modules



Input range of 100-240V (AC) & fixed output of 12V with 1.25A max permissible load. Supplied with IEC input & 16 pin molex connector.

- Over-output voltage protection unit powers down if output exceeds 15-18V
- Short circuit protection unit powers down & restarts if short circuited
- EN55022B standard, CE & CUL marked, lead-free
- Can power multiple units up to 1.25A max current

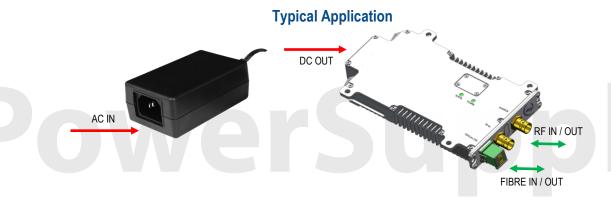

Specifications and max operating parameters for safe and reliable operation				
Parameter	Value	Comment		
Input voltage range	100-240V (AC)	47-63Hz AC range (90-264V max)		
Max input current	580mA	RMS Max		
Max current load	2 A			
Operating temperature	0 to 40°C	Indoor use only		
Storage Temperature	-20°C to +80°C			
Humidity	85%	Non-condensing		











Model Number: PSU12F125-9701-ML3

Switch Mode Power Supply

Technical specifications and operating parameters


PSU range available				
Model Number	Input	Output	Other	
PSU12F125-9701-SLP	100-240V (AC), 0.58A	12V (DC), 2 A	Solder pin output (Red sleeve = Positive)	
PSU12F125-9701-ML2	100-240V (AC), 0.58A	12V (DC), 2 A	Female 3 pin Molex socket	
PSU12F125-9701-ML3	100-240V (AC), 0.58A	12V (DC), 2 A	Female 16 Pin Molex Socket (For use with 400 series Fibre components only)	
PSU12F125-9701-RML3	100-240V (AC), 0.58 A	12V (DC), 2 A	Dual redundant PSU option with 2 PSU's configured to 1 Female 16 Pin Molex Socket (For use with 400 series Fibre components only)	

Environmental			
Operating Temperature	0°C to 45°C		
Storage Temperature	-20°C to +75°C		
Location	Indoor use Only		
Humidity	85% non-condensing		
Altitude	10,000 feet		

Max Operating Parameters		
Input RF Power	+21 dBm (125mW)	
DC Voltage	35V on any RF port	
DC Current	500mA	
DC Consumption	100mA Max, 80mA typical	

Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions

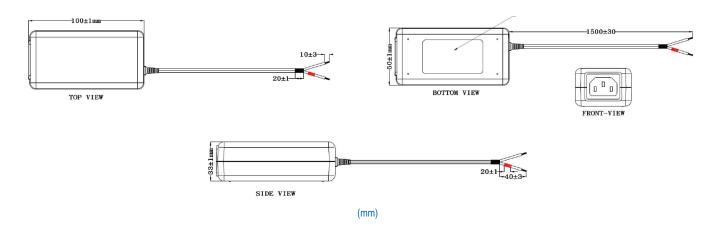

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy. Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE TELEPHONE +44 (0)1981 259020 FACSIMILE +44 (0)1981 259021

EMAIL \\info@etlsystems.com

WEB www.etlsystems.com

