


Model Number: **TEEL1-4000**

28V & 500mA DC rated

Fitted with LED bias indicator

L-Band Bias Tee

range. L-Band ready

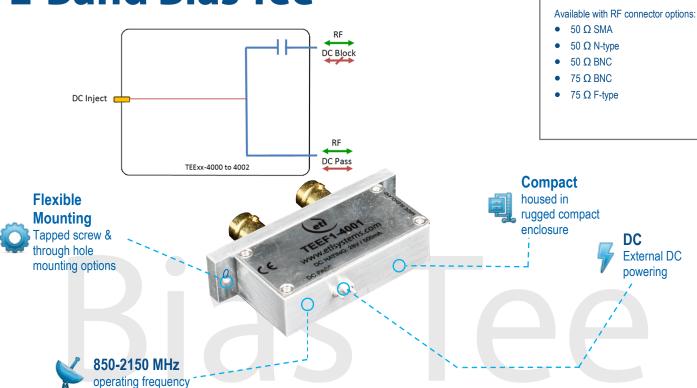

RF Parameters							
TEEL1-4000-XXXX		S5S5	N5N5	B5B5	B7B7	F7F7	
Frequency Range		850 - 2150 MHz					
RF Connectors		50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type	
Mean Insertion Loss (dB)		0.2±0.2	0.2±0.2	0.2±0.2	0.6±0.3	0.6±0.3	
Flatness ± (dB)		0.35	0.35	0.35	0.5	0.5	
Input Return Loss (dB)	Тур.	18	16	15	10	10	
	Min	14	14	14	8	8	
Output Return Loss (dB)	Тур.	16	16	15	10	10	
	Min	10	10	10	8	8	











Model Number: **TEEL1-4000**


10MHz L-Band Bias Tee

Technical specifications and operating parameters


Environmental				
Operating Temperature	0°C to 45°C			
Storage Temperature	-20°C to +75°C			
Location	Indoor use Only			
Humidity	85% non-condensing			
Altitude	10,000 feet			


Max Operating Parameters					
Input RF Power	+37 dBm (125mW)				
DC Voltage	28V on any RF port				
DC Current	0.5A				

Operation beyond these limits may cause instantaneous and permanent damage.

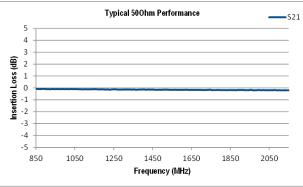


Insertion Loss (dB)

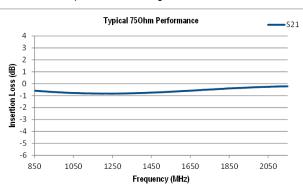


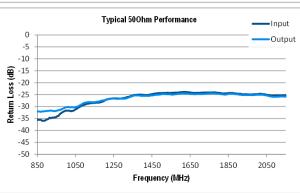



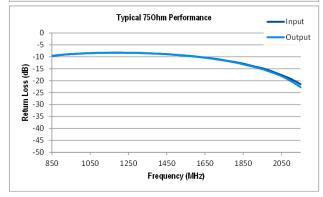

Physical Dimensions

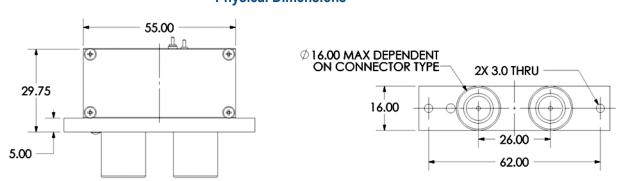

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy. Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE TELEPHONE +44 (0)1981 259020 FACSIMILE +44 (0)1981 259021

EMAIL info@etlsystems.com

WEB www.etlsystems.com



Model Number: **TEEL1-4000**

10MHz L-Band Bias Tee

DC Connector Options

We are able to offer the following options for connecting external DC power supplies:

Option 1

As standard our units are supplied with a feed-thru port for external soldering of power supply cable.

Option 2

For a Male Molex DC connector supplied on the Bias TEE please use the model number and add "/1" eg. TEEL1-4007-N5N5/1

Option 3

For a Female Molex socket and cable assembly please use the model number: CABMLX-1500-F or refer to the ETL accessories section on our website.





External Power Supplies

PSU Range							
Model Number	Input	Output	Other				
PSU12F125-9701-SLP	100-240V (AC), 0.6A	12V (DC), 1.25A	Solder pin output				
PSU12F125-9701-ML2	100-240V (AC), 0.6A	12V (DC), 1.25A	Female 3 pin Molex socket				
PSU48F150-9703-SLP	100-240V (AC), 2.5A	48V (DC), 3.13A	Solder pin output				
PSU48F150-9703-ML2	100-240V (AC), 2.5A	48V (DC), 3.13A	Female 3 pin Molex socket				
Pricing available on request							

PSU12F125-9701





Marine Oil & Gas





www.etlsystems.com

V 6.3 E&OE