



# 32 x 2-way Active L-band Splitter Shelf

## for Matrix Systems

The unit is designed to link ETL's range of matrices to make bigger matrix systems, while saving rack space and offering excellent RF performance.

**Typical applications:**

- Linking RF Matrices in expanding satellite teleports.
- Can be used for high density RF distribution chassis where rack space is limited
- As a replacement for non hot-swap passive systems to improve system design.



**Fixed gain & Fixed slope** factory set to balance input signals



**Compact**  
32 2-way splitter modules housed in a 3U high, 19", rack mountable chassis



**Resilience** from hot swap splitter modules, hot swap dual redundant power supplies and a hot swap CPU





**Local monitoring** via status LEDs on individual modules



**850 - 2150 MHz** operating frequency range.



**Remote control & monitoring** via RJ45 Ethernet port with SNMP & web browser interface

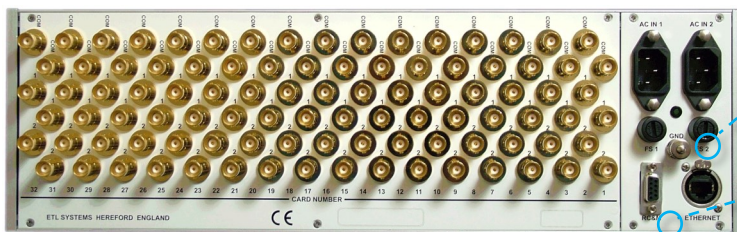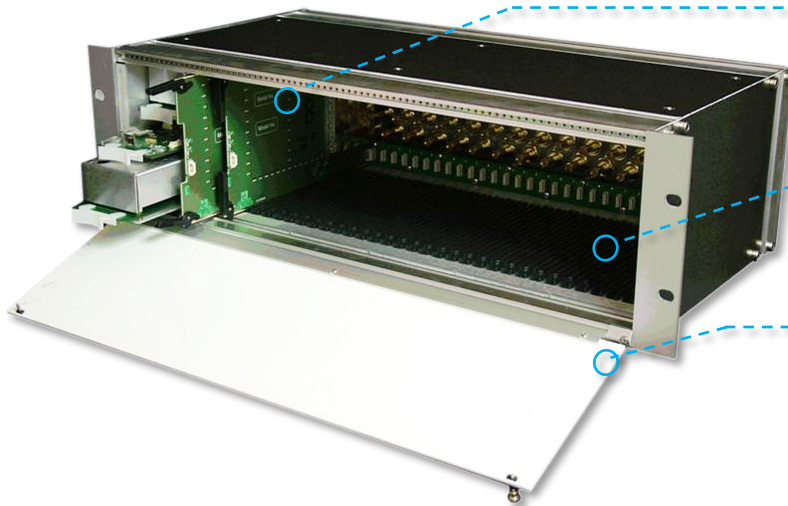

**Dry contact alarm port & serial communications** for amplifier & power supply status





**Technical specifications and operating parameters**

RF Parameters					
22302 Module slots used	Each splitter takes 1 slot. 32 slots available in chassis.				
Capacity	2-way splitter				
Frequency Range	850-2150 MHz (L-band)				
Gain	x± 1dB		x=0 to 10 dB. Nominal at 2150 MHz		
Slope	y dB positive slope		y=0 to +6 dB. Typical slope across 850-2150 MHz.		
RF Connectors	50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type	
Flatness	850-2150MHz	±0.75 dB	±1.0 dB	±1.8 dB	±2.0 dB
	Any 36MHz	±0.45 dB	±0.70 dB	±1.2 dB	±1.4 dB
Input Return Loss	Typical	16 dB	14 dB	12 dB	10 dB
	Minimum	12 dB	12 dB	10 dB	8 dB
Output Return Loss	Typical	16 dB	14 dB	12 dB	10 dB
	Minimum	12 dB	12 dB	10 dB	8 dB
Isolation	Card to Card	70 dB, 80 dB typical			
	O/P - O/P	>20 dB, 25 dB typical			
Noise Figure	7 dB Typical				
1dB GCP	+3 dB Minimum 1dB Gain Compression Point, output power				
Input RF Power	+ 16 dBm Absolute maximum				

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Environmental	
Operating temperature	0 to 45°C
Location	Indoor use only
Storage temperature	-20°C to +75°C
Humidity	20 to 90% non-condensing

Power		
PSU Power	85-264Vac 50-60Hz	Fused 2A, Dual IEC
Power Consumption	<30 W	Fully populated with DIV24 cards
LNB Power	None	
PSU	Dual redundant	Diode OR
Hot-swap PSU	Yes	
RF Monitoring	None	

System Control		
Local Control	Via Front Panel LCD and push buttons	
Remote Control	Via RS232 serial port & RJ45 Ethernet port 10/100 Base T. TCP/IP, SNMP & Web browser interface.	
Alarms	LED via CPU in chassis	Also amplifier status monitoring via HMI when used in a matrix switch system.

Physical	
Dimensions	3U high x 250mm deep x 19" wide
Weight	<10 kg
Colour	RAL9003-White (semi-matte)