




Up to 16 x 16 IF / Extended Distributive L-band Victor series Switch Matrix / Router

with LNB powering


Typical applications:

- TVRO, smaller teleports and satellite ground stations.
- · Oil and gas applications.
- RF distribution in cruise liners or luxury yachts.
- SNG and outside broadcast trucks.

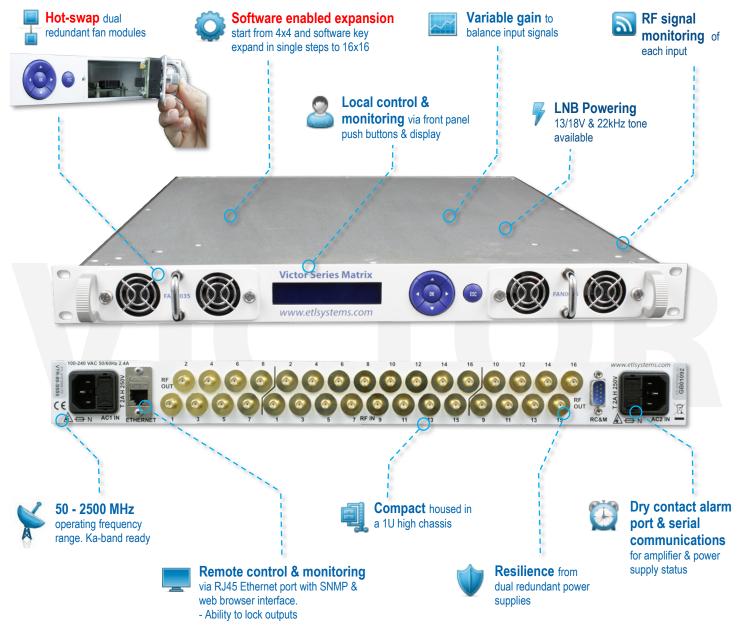

















Technical specifications and operating parameters

RF Parameters					
Capacity		Up to 16 inputs x 16 outputs			
Routing		Distributive, non-blocking		Any input can be connected to any number of outputs	
Frequency Range		50-2500 MHz (IF / Extended L-band)			
RF Connectors		50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type
Flatness	Full band	±1.75 dB	±1.75 dB	±2.0 dB	±2.5 dB
	850-2150MHz	±1.5 dB	±1.5 dB	±1.75 dB	±1.75 dB
	50-200MHz	±0.5 dB	±0.5 dB	±0.5 dB	±0.5 dB
	Any 36MHz	±0.25 dB	±0.3 dB	±0.4 dB	±0.45 dB
Input	Typical	18 dB	16 dB	12 dB	10 dB
Return	Minimum 2150	12 dB	12 dB	8 dB	8 dB
Loss	Minimum 2500	10 dB	10 dB	8 dB	6 dB
Output Return Loss	Typical	18 dB	16 dB	12 dB	10 dB
	Minimum 2150	12 dB	12 dB	8 dB	8 dB
	Minimum 2500	10 dB	10 dB	8 dB	6 dB
	Gain	0 ± 2 dB		Typical, mean across band	
Gain	Max Gain G _{max}	+ 3 dB		Typical, mean across band	
	Min Gain G _{min}	- 3 dB		Typical, mean across band	
	Gain steps	0.25 dB		Fine monotonic gain control	
4-ID 00D	50-2150 MHz	1 dBm ± 2		Output power	
1dB GCP	2150-2500 MHz	-3 dBm ± 2		Output power	
OIP3		+12 dBm		3rd order intercept point, output power	
OIP2		+20 dBm		2nd order intercept point, output power	
	I/P - O/P	60 dB (70 dB typical)		Minimum between any 2 ports	
Isolation	I/P - I/P	75 dB (85 dB typical)		Minimum between any 2 ports	
	O/P - O/P	75 dB (85 dB typical)		Minimum between any 2 ports	
Group	50-2500MHz	≤ 3 ns			
Delay	200-2500MHz	≤ 1 ns			
Noise Figure	Max gain	17 dB		Typical, maximum gain, 1 input routed to 1 output	
	Unity gain	21 dB		Typical, maximum gain, 1 input routed to 1 output	
	Min gain	25 dB		Typical, maximum gain, 1 input routed to 1 output	
RF Monitoring		-50 to +5 dBm		Input power, high & low limits	
Input RF Power		+ 24 dBm		Absolute maximum	

Environmental		
Operating temperature	0 to 45°C	
Location	Indoor use only	
Storage temperature	-20°C to +75°C	
Humidity	20 to 90% non-condensing	
Altitude	10,000 feet AMSL (Above Mean Sea Level)	

Power				
PSU Power	85-264Vac 50-60Hz	Fused 2A		
AC Consumption	50W	Max. consumption at steady state		
LNB Power	0/13/18V selectable, 22 kHz on/off 350mA max per channel, LNB current monitoring			
PSU	Dual redundant	Diode OR. Not hot swap		
RF Monitoring	Input power levels			
MTBF	114,000 hours			

System Control		
Local Control	Via Front Panel LCD and push buttons	
Remote Control	Via RS232/485 serial port and RJ45 Ethemet port 10/100 Base T. TCP/IP, SNMP & Web browser interface.	
Alarms	Dry contact (D-type) & Ethernet (RJ45) for PSU & Amp. status	

Physical		
Dimensions	1U high x 550mm deep x 19" wide	
Weight	6 kg	
Colour	RAL 9003 semi-matte (white)	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: Typical parameters are guide figures and measured data may deviate from the quoted figures. ETL endeavours to exceed the quoted typical parameters where practically possible.









