

# 32 x 32 Enigma Extended L-band Combining Switch Matrix / Router

4th generation Enigma matrix with enhanced RF performance including variable gain  $-5$  dB to  $+5$  dB settable per output.

**850 - 2450 MHz**

operating frequency range

**Suitable for HTS applications**

due to extended bandwidth

**Compact**

up to 32 inputs x 32 outputs  
in a 6U high chassis

**Upgraded local control & monitoring**

via front panel capacitive touchscreen

**Expansion**

in single increments or with additional matrix  
modules for larger systems

**Self diagnostics**

with continuous monitoring  
of amplifiers, CPUs & PSUs

**Resilience**

from dual redundant power supplies & CPU modules

**Minimal impact from failure**

with hot-swap single input & output  
RF cards, dual power supplies & dual  
CPUs, fans

**Dry contact alarm port**


for amplifier & power supply status

**Future proof secure protocols**

with SNMPv3 & HTTPS

**Remote control & monitoring**

via RJ45 Ethernet port with SNMP & web  
browser interface

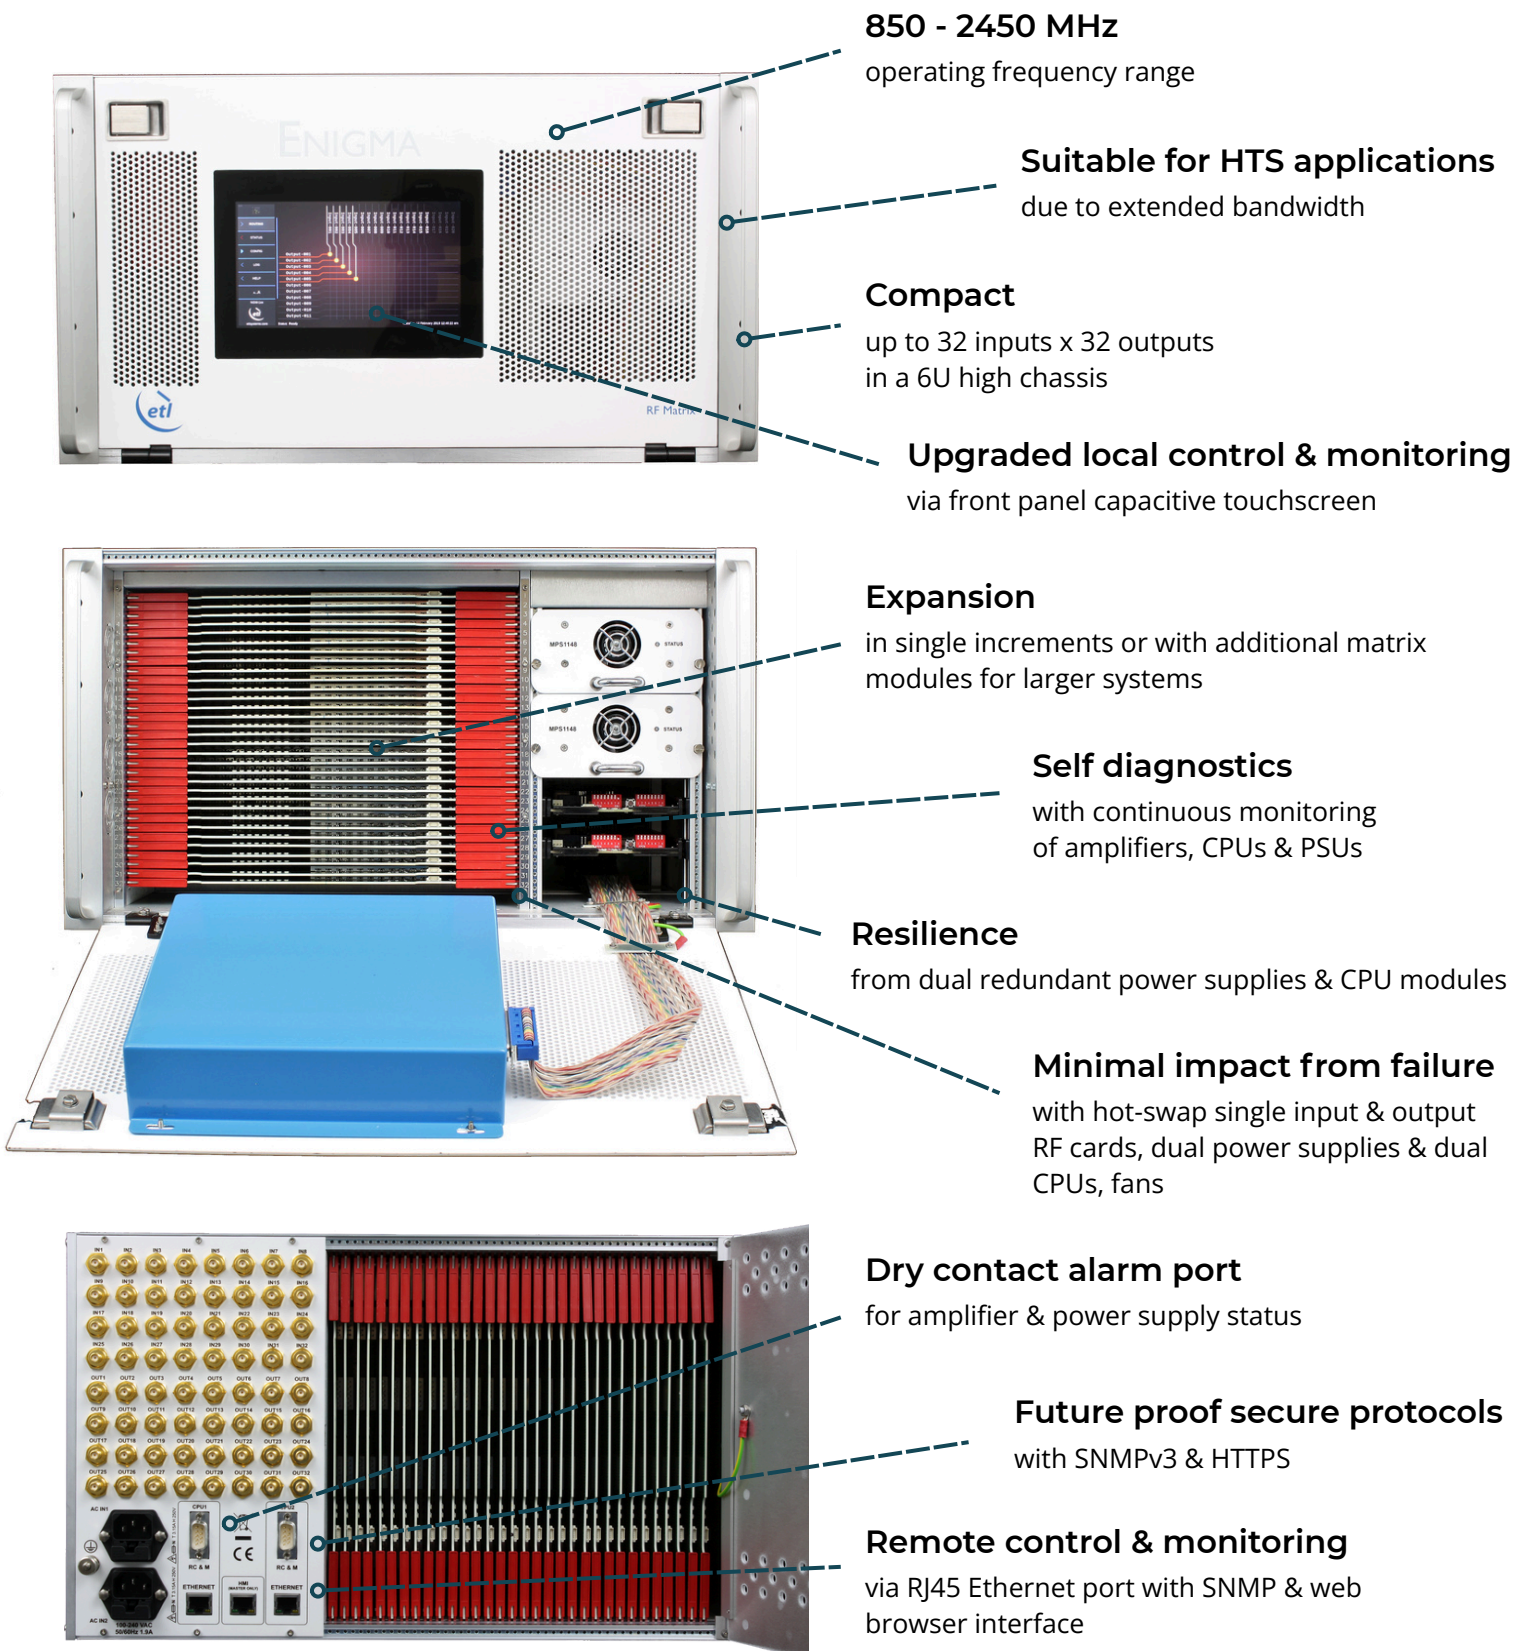

RF Parameters					
Capacity		32 inputs x 32 outputs, fully populated			
Routing		Combining, non-blocking. Many inputs can be routed to each output.			
Frequency Range		850-2450 MHz (Extended L-band)			
Gain		0±1 dB Typical, mean across band			
Gain Control		-5 to +5 dB in 0.25 dB steps . Settable at each output.			
RF Connectors		50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type
		All ports DC blocked			
Gain Flatness	Full band	±1.25 dB	±1.25 dB	±1.5 dB	±1.5 dB
Any 36MHz	< 2150 MHz	±0.25 dB	±0.25 dB	±0.5 dB	±0.5 dB
	> 2150 MHz	±0.30 dB	±0.30 dB	±0.50 dB	±0.50 dB
Input Return Loss	Typical	18 dB	18 dB	16 dB	16 dB
	Minimum	14 dB	14 dB	10 dB	10 dB
Output Return Loss	Typical	20 dB	20 dB	16 dB	16 dB
	Minimum	16 dB	16 dB	10 dB	10 dB
Isolation (Min. between any 2 ports)	Input-Output	60 dB			
	Input-Input	75 dB			
	Output-Output	75 dB			
Group Delay		≤ 1 ns, across operational bandwidth			
Noise Figure	Typical	16 dB		With one input routed to one output at unity gain.	
	Maximum	18 dB			
1dB GCP	<2150MHz	+10 dBm		1dB Gain Compression point, output power, at unity gain.	
	>2150MHz	+8 dBm			
OIP3	Typical	22 dBm at unity gain			
	Maximum	20 dBm at unity gain			
OIP2	Typical	32 dBm at unity gain			
	Minimum	30 dBm at unity gain			
Switching Time		< 50ms from receipt of a command to implementation of path change			
Input RF Power		+ 20 dBm		Absolute maximum	

System Control			
Local Control		Via Front Panel capacitive touchscreen	
Remote Control & Monitoring		Ethernet port via RJ45 10BaseT/100 BaseTx. TCP/IP, SNMPv3, HTTPS & Web browser interface.	
Alarms		Ethernet (RJ45) & Dry contact (D-type) for PSU & Amp. status	
Power			
PSU Power		85-264Vac 50-60Hz	Fused 2A
AC Consumption		150W	Max. consumption at steady state
LNB Power		None	
PSU		Dual redundant & alarmed	Diode OR. Hot swappable
Hot-swap PSU		Yes	
CPU		Dual redundant	Hot swappable
Input cards		Hot swap	Failure affects only one input port
Output cards		Hot swap	Failure affects only one output port
MTTR		20 mins, 15 mins to retrieve spare part and 5 mins to replace	Applies to LRUs only and assumed in house stock
MTBF	Chassis	271,444	Chassis excludes HMI & RF cards
	Switch card	270,297	
	Divider card	317,227	
Environmental			
Operating temperature		0 to 45°C	
Gain Stability versus Temperature		0.05dB/°C	
Storage temperature		-20°C to +75°C	
Location		Indoor use only	
Humidity		20 to 90% non-condensing	
Altitude (operational)		10,000 feet AMSL (Above Mean Sea Level)	
Altitude (storage)		30,000 feet AMSL (Above Mean Sea Level)	
Physical			
Dimensions		6U high x 450mm deep x 19" wide	
Weight		35 kg, fully populated	
Colour		RAL9003—White (Semi-Matte)	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.