


Model Number: **SCP-2603**

RF Components

Scorpion 2-Way Passive Splitter/Combiner

850 - 2150 MHz



- All ports 10MHz & DC blocked.
- All ports located on rear of unit.
- Can be standalone or mounting in our Scorpion 1U Chassis. Model SCP-1U-11.

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type



Chassis Mounting

Tapped screw & through hole for use with Scorpion 1U chassis mount systems



RF Parameters							
SCP-2603-XXXX		S5S5	N5N5	B5B5	B7B7	F7F7	
Frequency Range		850 - 2150 MHz					
RF Connectors		50Ω SMA	50Ω N-Type	50Ω BNC	75Ω BNC	75Ω F-Type	
Insertion Loss (dB)	Тур.	0.7	0.7	1.0	1.5	1.5	
	Max	1.4	1.4	1.4	2.0	2.0	
Flatness ± (dB)		0.4	0.4	0.4	1.0	1.0	
Input Return Loss (dB)	Тур.	18	18	17	14	14	
	Min	12	12	10	8	8	
Output Return Loss (dB)	Тур.	18	18	17	14	14	
	Min	12	12	10	8	8	
Isolation (dB)	Тур.	20	20	20	20	20	
Amplitude Balance (dB)		≤ 0.3	≤ 0.5	≤ 0.5	≤ 1.0	≤ 1.0	
Phase Balance (Φ)		≤ 3°	≤ 4°	≤ 4°	≤ 10°	≤ 10°	

The given Insertion Loss specified is the loss above the theoretical limit for a lossless divider 10MHz Rejection is $18dB^*$ *To ports which are applicable

Broadcast



Marine Oil & Gas



SNG & VSAT



Satellite Teleport



www.etlsystems.com




Model Number: **SCP-2603**

Scorpion 2-Way Passive Splitter/Combiner

RF Components

Technical specifications and operating parameters

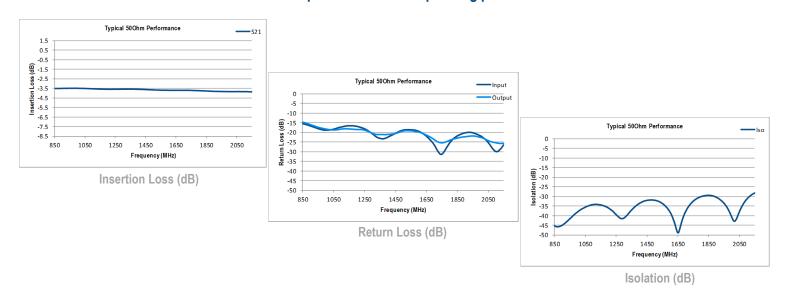


Environmental					
Operating Temperature		0°C to +45°C			
Storage Temperature		-20°C to +75°C			
Location		Indoor use Only			
Humidity	Max	85% non-condensing			
Altitude	Max	10,000 feet			

Max Operating Parameters				
Input RF Power	+34 dBm (2.5W) As Splitter +27 dBm (0.5W) As Combiner			
DC Voltage	35V on any RF port			
DC Current Max	1A Max total Current			

Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions (mm)

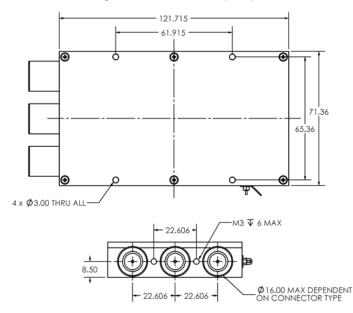

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

ETL SYSTEMS LIMITED Coldwell Radio Station Madley Hereford England HR2 9NE TELEPHONE +44 (0)1981 259020

EMAIL info@etlsystems.com

FACSIMILE +44 (0)1981 259021

www.etlsystems.com









