


## Model Number: **EQUL1P-4521**

L-band Passive Equaliser

850 - 2150 MHz

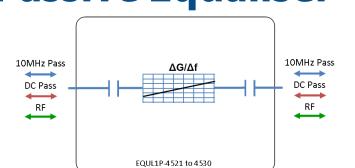

- Reciprocal device
- DC & 10 MHz pass between the two ports
- 1dB positive slope

Available with RF connector options:

- 50 Ω BNC
- 50 Ω N-Type
- 50 Ω SMA

Compact
Housed in
rugged compact
enclosure
i

Flexible Mounting Tapped screw &

through hole mounting options



RF Parameters					
EQUL1P-4521-xxxx		S5S5 N5N5		B5B5	
Frequency Range		850 - 2150 MHz			
RF Connectors		50Ω SMA	50Ω N-Type	50Ω BNC	
Mean Insertion Loss (dB)	Тур.	2.0	2.0	2.0	
	Max.	3.5	3.5	3.5	
Slope Positive (dB)		$1.0 \pm 0.3$	1.0 ± 0.3	$1.0 \pm 0.3$	
Input Return Loss (dB)	Тур.	16	16	14	
	Min	12	12	10	
Output Return Loss (dB)	Тур.	16	16	14	
	Min	12	12	10	













## **Model Number: EQUL1P-4521**

L-band Passive Equaliser

## Technical specifications and operating parameters

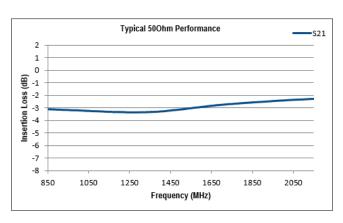

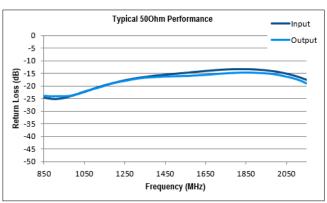

Gain (dB)


Return Loss (dB)

Environmental				
Operating Temperature		0°C to +65°C		
Storage Temperature		-20°C to +75°C		
Location		Indoor use Only		
Humidity	Max	90% non-condensing		
Altitude	Max	10,000 feet		

Max Operating Parameters				
Input RF Power	+37 dBm (5W)			
DC Voltage	28 V			
DC Current	3 A			

Operation beyond these limits may cause instantaneous and permanent damage.

## **Physical Dimensions (mm)**

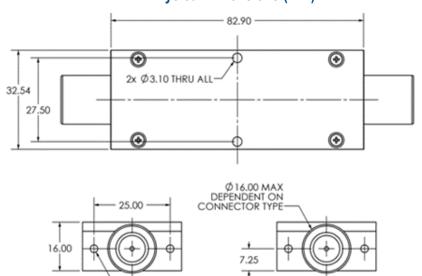

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.

**ETL SYSTEMS LIMITED** Coldwell Radio Station Madley Hereford England HR2 9NE

**TELEPHONE** +44 (0)1981 259020

info@etlsystems.com

**FACSIMILE** +44 (0)1981 259021

M3 ¥6.00 MAX

www.etlsystems.com





