




## ***Equalised 16-Way L-band Splitter (or Divider)***

This unit contains an ETL 16-way active splitter. The unit has dual redundant power supplies and can be used to provide LNB powering (the LNB bias for each RF input port can be switched on and off from the rear panel). The unit has a dry contact alarm for PSU failure.

The power divider is available in a variety of 75 and 50 ohm impedances and connector types (model numbers will vary) and with single or dual power supplies. This particular unit has 50 ohm N-type connectors. It has dual redundant power supplies. Distribution amplifiers with higher levels of fixed gain and variable gain are also available.

product overview

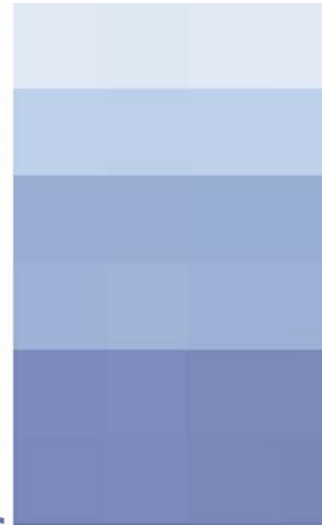

### **Key features**

- 850–2150 MHz operating range
- 50 ohm N-Type connectors
- Dual redundant PSU's
- Gain 0 dB  $\pm$  1 dB
- Flatness  $\pm$  1 dB over the bandwidth
- Return loss >12 dB
- Switchable (on/off) LNB Power

### **Model**

***D0116S2ULAN5N5-D8***

*satellite systems*

# Equalised 16-Way L-band Splitter - Technical Summary



FIG.1 Rear of D0116S2ULA-N5N5-D8

## Other information

- 85 to 264 VAC, 50/60Hz
- Dual redundant power supplies and dual mains inlets
- Dry contact alarm for PSU failure
- 2U high 350mm 19" shelf
- Colour – Light Grey RAL 7035.

**Model**  
**D0116S2ULAN5N5-D8**



ETL Systems Limited  
Coldwell Radio Station  
Madley, Hereford,  
England HR2 9HJ  
T +44 (0)1981 259825  
F +44 (0)1981 259839  
E [info@etlsystems.com](mailto:info@etlsystems.com)  
[www.etlsystems.com](http://www.etlsystems.com)

<u>Parameter</u>	<u>Model</u> <u>D0116S2ULAN5N5-D8</u>
Capacity	16-way
Frequency	850-2150 MHz
Impedance IN	50 Ω
RF Port IN	N-Type
Impedance OUT	50 Ω
RF Port OUT	N-Type
Insertion Gain	+0 dB nominal (± 1dB)
Flatness over 850 – 2150 MHz (typical)	±1.0 dB
Flatness over any 36 MHz	±0.35 dB
Input Return Loss	>12 dB
Output Return Loss	>12 dB
1dB Compression Point (input power)	0 dBm
LNB power	18V, 500mA per channel fused
Noise Figure	7dB

ETL Systems develop, design and manufacture specialist equipment for satellite ground stations. For a fuller description of the ETL product range, please see our website on [www.etlsystems.com](http://www.etlsystems.com). This range can be used as the basis to meet your specific demands.

*satellite systems*

V 1.1 E & OE



THE QUEEN'S AWARDS  
FOR ENTERPRISE:  
INTERNATIONAL TRADE  
2007