

StingRay Ethernet Over Fibre Genus Module

Optical Ethernet double width module, 2x RJ-45 + 2xSFP Slots

SRY-G2S-DA-320 is an electrical data to optical SFP module bi-directional link. The module is double width occupying two 2U chassis slots. There are two Ethernet Ports RJ-45 10/100/1000BASE-T and two Gigabit Ethernet SFP module slots; two fibres are required for each standard SFP slot, since the operation is bi-directional. Alternatively BiDi SFP module could be used for single fibre operation. Ports are connected via an unmanaged Ethernet switch. The SFP modules are available with LC optical connectors, flat polished. It is intended for use in ETL's Genus 2U Series chassis and ODUs.

Module




Compact
Each module occupies 2 slots in GENUS chassis

Hot Swap & replaceable ethernet over fibre module

2 x SFP module slots

2 x RJ45 ports
10/100/1000 Base-T

Chassis

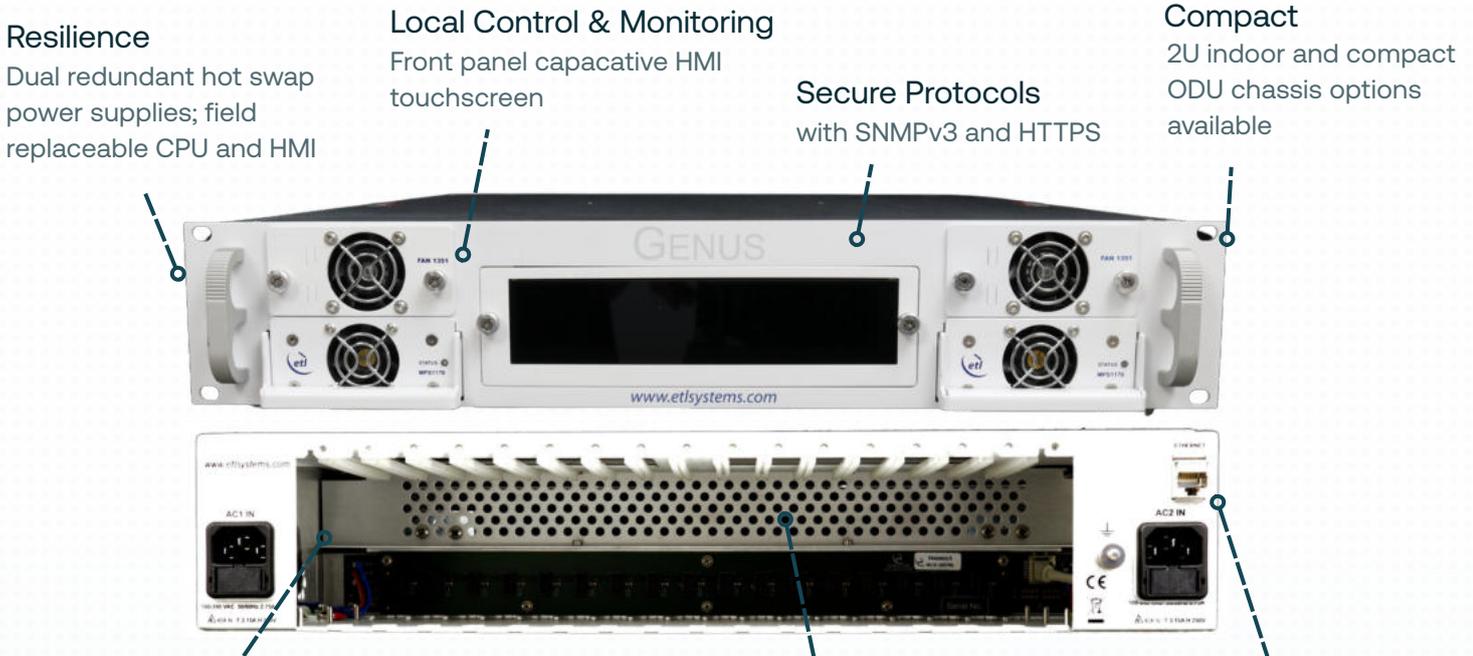

Resilience
Dual redundant hot swap power supplies; field replaceable CPU and HMI

Local Control & Monitoring
Front panel capacitive HMI touchscreen

Secure Protocols
with SNMPv3 and HTTPS

Compact
2U indoor and compact ODU chassis options available


Configurable
Choose from a mixture of fibre modules with different operating frequencies, or house alongside other RF functions

10MHz Reference
Optional field-replaceable internal 10MHz reference and external reference inject port with auto detection

Remote Control & Monitoring
via RJ45 Ethernet port with SNMP and web browser interface

RF Parameters		
Model Number	SRY-G2S-DA-320	
Copper Ethernet Ports	2x10/100/1000BASE-T RJ-45 (Up to Gigabit Ethernet)	
Optical Ethernet Ports	2x SFP module slot	
Optical Connector	LC duplex, Single mode fibre (Other connector options are available upon request. Not angle polished)	
Optical Wavelength	Customer Selectable	
Power Consumption (W)	TBD (max. consumption at steady state)	
MTBF	TBD	
Control	Local and Remote	Local front panel control. See chassis spec. Remote control via chassis Ethernet. 10/100Base T. TCP/IP, SNMP, web browser
Temperature Monitors	Each module monitored	All are independently monitored and reported
Operating Temperature	-40 °C to +55 °C	
Storage Temperature	-40 °C to 85 °C	
Location	Indoor	Outdoor mounting as part of ETL ODU only
Humidity	20% to 90% non-condensing relative humidity	
Altitude	10,000 feet AMSL	
Weight	TBC	
Dimensions	TBC	

Typical Application

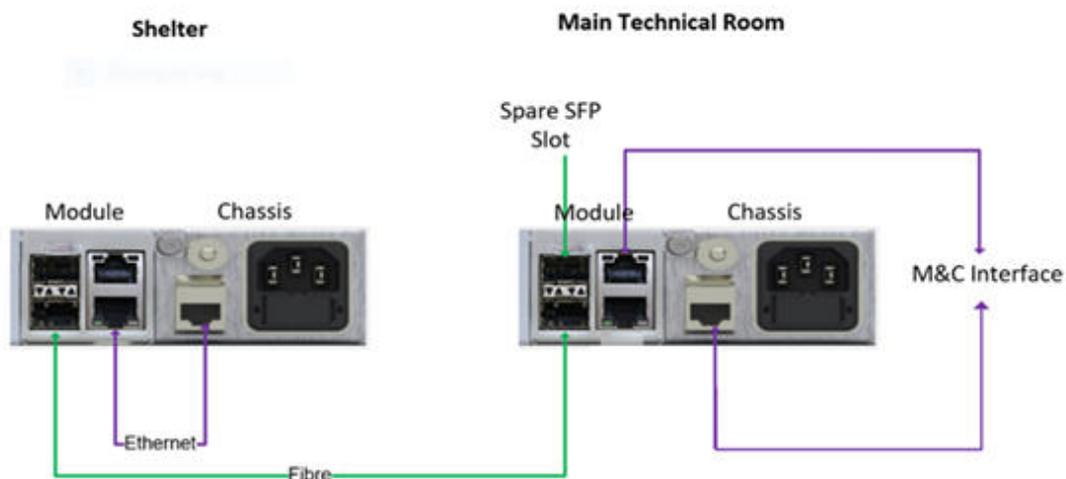

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.