

SpacePath 750W Ultralinear X-Band Antenna Mount HPA

The STA6275 X series HPA provides ultra linear, high efficiency performance in a compact, lightweight, rugged, weatherproof, antenna mount enclosure. The advanced packaging and cooling techniques enable the unit to operate in extreme environmental conditions from direct rain to direct sunlight. The amplifiers can be simply deployed anywhere in the world, are user-friendly and incorporate a comprehensive remote control facility as standard, including RS485, RS232 and Ethernet options.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 30 years of experience in the design and manufacture of satellite amplifiers.

The company's products have an enviable reputation for performance, robust quality and reliable service.


The STA6275 X is available with a wide range of options and accessories, backed by worldwide technical support.

Features

- Advanced cooling design enables operation at +60°C and in direct sunlight
- Weatherproof antenna mount construction allows exposed mounting
- Ethernet/SMP/Webpage GUI interfaces
- Broadband – high efficiency operation
- Wide input voltage range - can operate from mains supplies worldwide
- Redundant control - contains control and drive circuits for 1:1 redundancy
- Stand-alone setting - automatically sequences to transmit mode
- Wide range of accessories including: Controllers, waveguide networks, cable assemblies



Block Diagram

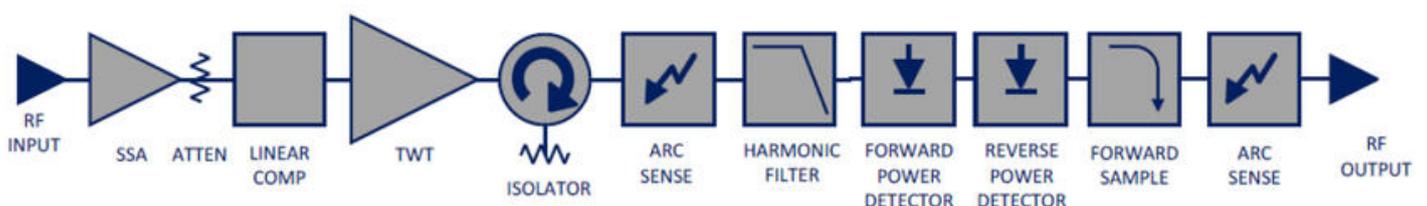

RF Performance		
Frequency range		XX1: 7.9 – 8.4 GHz
Output Power (for load VSWR ≤ 1.5:1)	TWT Power, Peak/CW	58.75 dBm (750 W)
	HPA Flange Power, Peak/CW	58.13 dBm (650 W)
Gain		≥ 70 dB
Gain Variation, 40 MHz, $\Delta G_{40\text{MHz}}$		≤ 1.0 dB peak-peak
Gain Variation, 500 MHz, $\Delta G_{500\text{MHz}}$		≤ 2.5 dB peak-peak ¹ ≤ 4.0 dB peak-peak ²
Slope, ΔG_{SLOPE}		± 0.04 dB/MHz
Gain Stability vs. Time		± 0.25 dB / 24hrs @ constant drive and temperature
Gain Stability vs. Temperature		± 1.0 dB @ constant drive and frequency
Adjustment range, G_{ADJ}		30.0 dB typical
Adjustment step size		0.1 dB
AM/PM		≤ 2.5°/dB @ Prated-6 dB
Inter-modulations (IMD) 2 equal carriers 10MHz apart		≤ -18 dBc @ Prated-4 dB ¹ ≤ -26 dBc @ Prated-4 dB ²
Spectral Re-growth (SR)		≤ -30 dBc @ Prated-4 dB ²
Noise Power Ratio (NPR)		≤ -19 dBc @ Prated-4 dB ²
Noise power	Transmit band	≤ -70 dBW/4 kHz
	Receive band	≤ -70 dBW/4 kHz (7.25 - 7.75 GHz)
Spurious @ $P_o \leq \text{MLP}$		≤ -60 dBc
Residual AM		≤ -50 dBc, $f < 10\text{kHz}$ $\text{■} \leq -20(1.5+\text{LOG}(\text{frequency KHz}))\text{dBc}$, $f = 10\text{KHz to } 500\text{KHz}$ $\text{■} \leq -85 \text{ dBc } > 500\text{KHz}$
Phase Noise		10dB below IESS requirement ≤ -50 dBc max, AC fundamental ≤ -47 dBc max, Sum of all spurs
Group Delay	Linear	0.01 nsec/MHz, max
	Parabolic	0.002 nsec/MHz ² , max
	Ripple	0.5 nsec/Peak-Peak, max
Input VSWR (Return Loss)		≤ 1.3:1 (17.7 dB)
Output VSWR (Return Loss)		≤ 1.3:1 (17.7 dB)
Load VSWR (no damage)		≤ 2.0:1 (9.5 dB)
Harmonic 2 nd & 3 rd		≤ -60 dBc

1) No Linearizer 2) With Linearizer

Electrical	
AC Input Voltage	200-240 VAC \pm 10%, single phase 50-60 Hz \pm 5%
Full Load Current	12.5 A max @ 200 VAC
Power Consumption	2200 VA typical 2450 VA maximum
Power Factor	0.98 typical 0.96 minimum

Physical	
Dimensions (request outline)	58.8 cm deep x 25.4 cm width x 27.1 cm height
Weight	25Kg typ
RF Input	Type N(f) 50 ohm
RF Output	CPR112G with 8-32 UNF threaded holes
RF Sample port	Type N(f) 50 ohm
AC Input	Amphenol C016 20C003 200 12
Ethernet	RJF71B (IP67 RJ45 Connector)
M&C Connector	PT07E18-32S (MS3114E-18-32S)

Environmental	
Operating temperature	-40°C to +60°C
Relative humidity	100% condensing
Altitude	12,000 ft. with standard adiabatic de-rating of 2°C/1000 ft., operating 50,000 ft., non-operating
Shock	15 g peak, 11mSec, 1/2 sine
Vibration	3.2 g rms, 10-500 Hz
Acoustic Noise	65 dBA @ \geq 3 ft. from amplifier
Solar Gain	1120 2/m ²

Specifications are subject to change without notice